

Security Architecture References for Public Cloud laaS

Guide for a Successful Lift and Shift Secure Migration Model for Microsoft Azure and Amazon Web Services



ABSTRACT

This white paper outlines the use cases, architecture diagrams, and a Zero Trust approach that will allow customers to build the best strategy for a public cloud data center. This will be achieved using CloudGuard Network Security, according to the customer's business needs, within a variety of cloud service providers.

AUDIENCE

The desire to transition from a hardware-centric to an application-centric network construct is driving more and more organizations to embrace the cloud as part of their IT strategy. As a result, businesses are rapidly adopting cloud-based solutions to virtualize their data centers, as well as extending applications and data to public cloud environments.

This white paper aims to provide the reader with reference architectures explaining different technical topics taken from Microsoft, Amazon Web Services, and Check Point Software Technologies, as well as from a variety of technical blogs. The information presented in this paper is intended to educate and enable security and networking engineers, solution architects, and designers who would like to integrate public cloud IaaS solutions and Check Point Software Technologies for advanced security. To get the most from this paper, the reader should be well versed in cloud computing, network and security design, as well as Zero Trust methodologies.

TABLE OF CONTENTS

INTRODUCTION	4
What is Lift-and-Shift? Lift-and-Shift Optimized Model Shared Responsibility for Public laaS Zero Trust Model laaS Segmentation and Shared Responsibility	5 5 6
PUBLIC IAAS HUB-AND-SPOKE PRINCIPLES	
Hub-and-Spoke High-Level Design	11
REFERENCE ARCHITECTURE FOR PUBLIC CLOUD IAAS	12
Macro-segments and Micro-segments with Transit Security Hubs Microsoft Azure Security Architecture Amazon Web Services (AWS) Security Architecture	19
USE CASES	26
Ingress Traffic to the Public Cloud	
CONSOLIDATED CLOUD SECURITY MANAGEMENT	47
Cloud Network Security Management as a Service (Smart-1 Cloud) Unified Management R80.x/R81 Unified Security Policy Layers CloudGuard Controller Overview of Cloud Management Extension (CME) Smart-1 Cloud and Shared Responsibility CloudGuard Security Posture Management CloudGuard Intelligence and Threat Hunting	
Infrastructure as Code assessment with CloudGuard CPSM and Terraform CONCLUSION	
CONCLUSION	

INTRODUCTION

According to Gartner Forecasts for Worldwide Security and Risk Management Spending¹, during 2020 investment in cloud security will grow 33.3% versus that in 2019. More and more organizations are convinced that cloud transformation will lead to greater business opportunities and operational agility, and should therefore also be aware of the cyber security implications within the process. It should not be seen as a 1-to-1 shift, which only considers the traditional approach; rather it should be transformed and aligned with the business strategy and risk appetite.

Under this approach, organizations should understand three different migration models relevant for cloud migration, taking cyber security as the main driver:

- **Rehost (lift-and-shift)** The organization migrates their workloads as-is, with no refactoring, or rebuilding, and using a single VPC. Cyber security controls are also migrated 1-to-1 using almost the same security policies. This strategy can be high risk due to the lack of proper visibility and configuration management.
- Refactoring and Containerisation The organization's applications are individual components consuming different libraries and dependencies to transform data information. Application microsegmentation has separate containers associated with frontend, backend, and shared services, where traffic flows are split among the ingress, egress, east-west, and backhaul. Specific security controls are considered for the right enforcement and visibility.
- Rebuilding (shift-and-lift) The organization's business process needs a complete redesign to create a cloud-native applications. At this point cloud native application protection platforms are essential to enhance cyber security policies, and to provide a more significant advantage in the cloud.

What is Lift-and-Shift?

The main objective of lift-and-shift is to preserve the same architecture organizations already have in the public cloud, without making any significant changes in the design. In other words, it is the process of migrating an identical copy of a workload (considering the operating system, applications, and data), network design, and management, as-is. This makes it the fastest and least expensive path. From a security perspective, it also preserves the same management systems and even keeps the same security policies, at least in the initial stage of the cloud transformation. Lift-and-shift is the most common first stage of a general cloud transformation journey since it is relatively easy and fast to achieve.

Lift-and-shift brings several benefits to the overall security posture and operations of organizations, such as:

- Autoscaling, agility, and speed
- Deploying dynamic infrastructure to respond high demand
- Zero trust and micro-segmentation
- Adaptive and dynamic cloud-native security
- A transition from CAPEX to OPEX

However, organizations should beware of confusing the lift-and-shift migration model with a copy-and-paste strategy, as this may lead to a disaster if design errors are migrated, especially in security without the right controls and policies impacting the level of service.

¹ Gartner Forecasts Worldwide Security and Risk Management Spending Growth to Slow but Remain Positive in 2020, URL: https://www.gartner.com/en/newsroom/press-releases/2020-06-17-gartner-forecasts-worldwide-security-and-risk-managem

Lift-and-Shift Optimized Model

Check Point Software Technologies recommends a new migration model, enabling organizations to have greater flexibility, agility, speed, scalability, dynamic security, and posture management, for a better shared-responsibility model in their cloud data centers strategies. This model, called **Lift-and-Shift Optimized**, enables the harmonization **of** hub-and-spoke principles and a Zero Trust extended framework² to deliver full visibility and control of security and compliance. Consequently, it helps to minimize the attack surface and protects against vulnerabilities, identify theft, and data loss. Our suggested model can be used as the first step for migrating workloads that are candidates for migration to the cloud.

In the following sections, we will present different use cases with reference architectures, where CloudGuard NS (Cloud Network Security, aka CloudGuard IaaS) can provide a robust solution to secure all communication flows in the organization's VPC for a multi-cloud strategy deploying Azure and Amazon Web Services. Additionally, we will explain the importance of deploying CloudGuard CPSM as a single pane of glass to provide security posture management for IaaS deployments for multi-cloud architectures, and how to assist in their cloud security operations.

Shared Responsibility for Public laaS

In traditional IT environments, the organization owns the whole stack, and the dedicated security team makes the necessary infrastructure changes. In the public cloud laaS, some responsibilities are transferred to cloud service providers, and some are transferred to application owners.

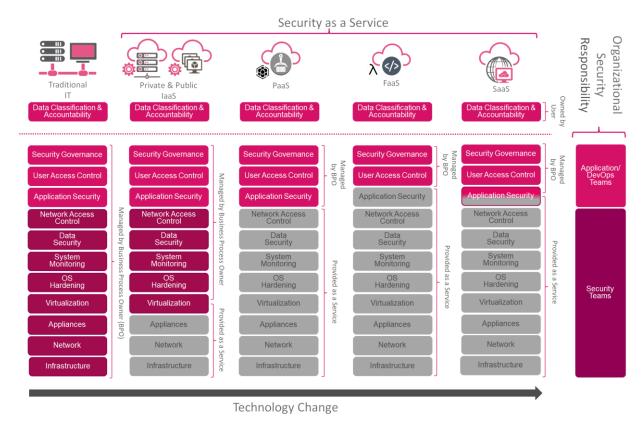


Figure 1: Shared-Responsibility Extended Model for Public laaS

² What ZTX Means for Vendors and Users, URL: https://go.forrester.com/blogs/what-ztx-means-for-vendors-and-users/

Cloud service providers are responsible³ for ensuring the security of the cloud environment itself, however, IT security teams are responsible for the security controls of the infrastructure under their responsibility. Once an organization moves to the PaaS/FaaS and SaaS, some responsibilities will be transferred to the DevSecOps groups. Nevertheless, leading research and advisory company, Gartner, stated that "through 2020, 99% of cloud security failures are the customer's fault." This means that the network security team is still responsible for the constant maturity of all the configurations related to the plumbing of the cloud data center. Cloud native network security and cloud security posture management tools for public laaS therefore provide a single pane of glass for the right deployment for Zero Trust controls.

Zero Trust Model

Shared responsibility, aligned with Zero Trust principles, provide better harmonization of security controls, helping to minimize the potential risks in the migration process, especially in day-to-day operations. In this section, we will explain how Zero Trust network and workload principles are less complicated, considering the hub-and-spoke approach and the service-oriented⁵ architecture (SOA) used to protect the applications and services of the organization.

A Zero Trust framework considers the following pillars:

- The Data: The core of the business
- The Workloads: Spokes that transform data in the information
- The Networks: Hubs where data and information are transported using micro-segmentation and end-toend encryption mechanisms
- The Devices: Endpoints or IoT devices that upload or access data to the Hubs
- **The People:** Who consume information using applications provided by the spokes. Also includes the administrators for the management of the cloud security operations through the security posture.

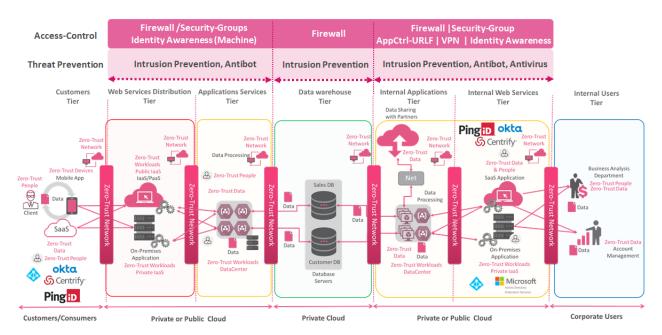


Figure 2: Zero-Trust Architecture Reference: Architecture for Public and Private laaS

³ Shared Responsibilities for Cloud Computing, URL: https://gallery.technet.microsoft.com/Shared-Responsibilities-81d0ff91

⁴ Is the Cloud Secure, URL: https://www.gartner.com/smarterwithgartner/is-the-cloud-secure/

⁵ Service-Oriented Architecture (SOA), URL:

https://www.ibm.com/support/knowledgecenter/en/SSMQ79_9.5.1/com.ibm.egl.pg.doc/topics/pegl_serv_overview.html

Proper security policies between the web tier, service-oriented application tier, and the databases tier allow the organization for a much better posture in the cloud environment to protect the different assets in the public laaS, therefore minimizing risks. SOA is the traditional approach that organizations follow in the migration process. However, once they start to migrate to the microservices, the SOA model should be transformed too.

laaS Segmentation and Shared Responsibility

laaS segmentation aims to reduce the blast radius and allow security teams to enforce perimeter security controls. Two powerful options facilitate these capabilities: micro-segmentation and macro-segmentation. In the following table, we will review the differences between the tools and their practical uses for laaS segmentation.

- **Macro-segmentation:** Creates security zones within the overall network to prevent attacks between primary server segments, with multiple workloads, with the same functionality, and security classification.
- Micro-segmentation: Logically divides vNET/VPC into distinct security segments up to individual
 workload levels. This granularity level at which micro-segmentation controls workload traffic, minimizes
 security threats and creates a Zero Trust security model. For the public cloud, the Check Point CSPM
 provides centralized management and can be applied to individual workloads, enabling a more secure
 environment without the additional overhead of workload-specific configuration.

	Public laaS Micro-Segmentation	Public laaS Macro-Segmentation
Use Case	Used to logically divide the VPC/vNET into different security zones, up to individual workload level	Used to segregate between major groups of workloads with similar functionality and security classifications (such as web servers, application servers, and databases), preventing attackers from moving inside the perimeter and attacking the production workloads
Scope	More granular since it controls lateral movement across hosts	More on the perimeter level and across security zones
Policies	Granular policies between host-to-host	Network/segment level policies
Policy Enforcement	Computing instances	Subnet/VLAN
Management and Control	Host-to-host security policies for access control or threat prevention	Functional vNET/VPC security policies for access control or threat prevention
Host-to-Host Communication Control	Between workloads in the same segment	Network or security zone level
Traffic Path Control	East-west or lateral traffic	North-south and east-west (inspect traffic between web, app, and DB zones)
Benefits	 Enforce granular tier-level segmentation within the same application group. Critical applications will remain safe even in the case of a breach. Enforce policy up to layer 7 	Enforce security at the perimeter to protect against attacks Simpler to implement than micro-segmentation
Disadvantages	High skills required, including application-level visibility to employ microsegmentation	Skill requirement for deploying network-based segmentation policies

Figure 3: Micro-Segments and Macro-Segments Attributes⁶

⁶ Matrix from networkinterview.com, URL: https://networkinterview.com/micro-segmentation-vs-network-segmentation/

Using macro-segmentation and micro-segmentation can help organizations make better choices regarding the security controls that can be used according to the applications flows. In addition, access control can be deployed in three different scenarios: network-based, agent-based, or host-based and API, using cloud-native tools.

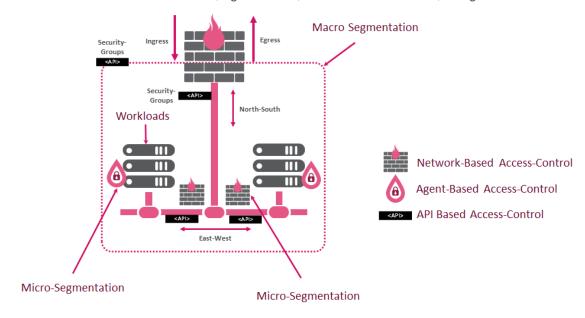


Figure 4: Macro-Segmentation and Micro-segmentation

The diagram above provides a visual representation of all the flows protected in the public laaS. With this perspective, the following table proposes different security segments according to the flows, enabling you to select the controls needed more accurately.

Security Segment or Security Hub	Flow	Security Blades
Ingress Traffic from the Internet	North-south access control and traffic inspection	Firewall, rule-based IPS, SSL inspection
Egress Traffic to the Internet for Computing Instances, Azure Virtual Desktop or Amazon Web Services Workspaces	North-south access Control and traffic inspection	Firewall, application control, URLF, antibot, antivirus, SSL inspection or HTTP categorization
Traffic Between Different vNETs/VPC and Workloads	East-west access control	Network security groups or firewall
Traffic Between Different vNET/VPC and Workloads	East-west traffic inspection	Firewall, rule-based IPS
Traffic from SD-WAN/MPLS (Backhaul)	North-south	Firewall, rule-based IPS, Identity- Awareness
Traffic Between on-premises Data Center (BackHaul)	North-south	Firewall, rule-based IPS
Traffic Between Multi-Cloud Service Providers (Backhaul)	North-south	Firewall, rule-based IPS, VPN

Figure 5: Aligning Security Blades with the Security Segments

Under this approach, the shared responsibility model is more accessible for day-to-day operations. Transit Security Services vNET (Azure), Transit Gateway (Amazon Web Services) and Shared VPC (Google) provide the cloud

data-centers with better scalability and enable the Zero Trust network principles related with the functional segmentation.

PUBLIC IAAS HUB-AND-SPOKE PRINCIPLES

In this section, we will talk about hub-and-spoke model recommended by Microsoft⁷. The cloud environment is set up as a system of connections in which all spokes are connected to a transit hub, and all traffic to and from the spokes traverses the transit hub.

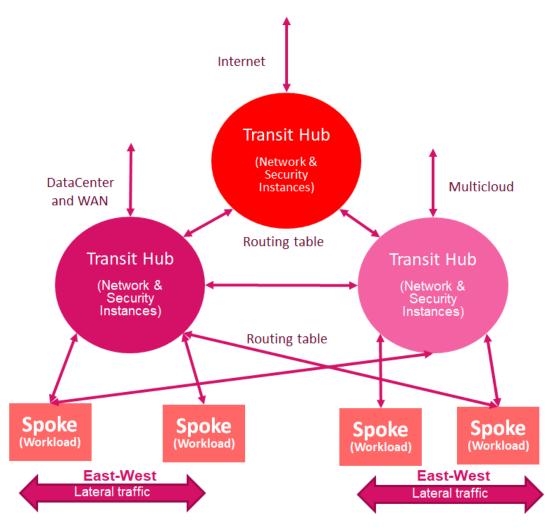


Figure 6: Hub and Spoke Architectural Principles

The main focus of this principle is to provide a more practical segmentation of the lift-and-shift strategies when vNET/VPC is used to provide an easier setup for Zero Trust networking in the cloud. While we can segment inside a vNET/VPC, there is no easy way to enforce traffic inspection as cloud service providers control all routing inside the vNET/VPC perimeter.

⁷ Hub-spoke network topology in Azure – URL: https://docs.microsoft.com/en-us/azure/architecture/reference-architectures/hybrid-networking/hub-spoke

Before we explore the design further, we should define the following:

1. A Spoke is an isolated network environment that contains a collection of one or more network subnets from which typical workloads can be installed and run. A typical use case is a spoke that contains several virtual servers that make up either a part of, or an entire application stack (web, application, and database). Another use case is a spoke which acts as an extension of existing on-premises networks, such as a set of QA servers for testing purposes or a set of data processing servers that utilize the cloud's on-demand provisioning for lower cost and improved agility.

However, from the security perspective, we have different spokes that can be deployed in the public laaS:

- 1.1. Transit Hubs
- 1.2. Computing Instance
- 1.3. Container On-Demand or as a Service
- 1.4. Kubernetes Cluster
- 1.5. Service EndPoints or VPC EndPoints
- 1.6. Serverless or Service Functions

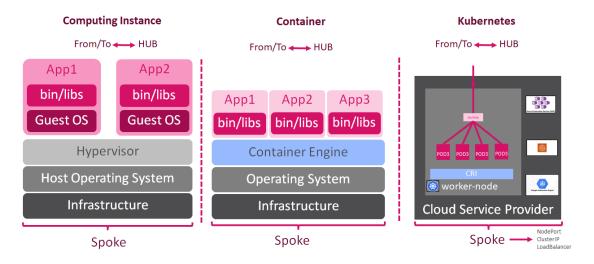


Figure 7: Examples of Different Spokes for the Public laaS

- 2. A Transit Hub enables flexibility and systematic separation of communication types through the environment. It can be designated for ingress traffic, for lateral traffic between spokes, traffic in/out of the corporate network, or for outgoing traffic to the internet or other cloud environments. The routing traffic can be easily configured according to the traffic flows in the applications.
 - In the following section, we will explain the flows within the transit hubs and the interactions used, to build the correct plumbing for the infrastructure
- 3. Transit Security Hub is an Azure Transit vNET or Amazon Web Services Transit Gateway, and GCP Shared VPC interconnects all virtual cloud and on-premises networks. The transit security concept is defined as the security control point for cloud network interconnections and inter-spoke security. The hubs are the only way in/out of the environment as well as the only way to traverse inside and between spokes in the environment. This is due to spokes not being connected directly but only being accessible through one of the hubs. A key element is the routing and connection configuration between the hubs and spokes (UDR, static routing, or BGP for more complex environments).

Hub-and-Spoke High-Level Design

A hub-and-spoke network security design provides a central component connected to multiple networks around it, enabling different security controls. Setting up this topology in the traditional on-premises data center can be expensive, however, in the cloud, there is no extra cost. The lift-and-shift optimized model enables one to build powerful networking and security scenarios in the public laaS, that in turn enables organizations to have different scenarios providing an agnostic approach:

- Setting up separate development and production environments with different security controls enabled
- Isolating the workloads of different customers using micro-segmentation and threat prevention capabilities
- Segregating environments to meet compliance requirements, for example, PCI, GDPR and HIPAA
- Segregating environments using cloud-native security controls, which use cloud security posture management tools
- Providing shared IT services, like active directory, DNS, and file servers
- Multicloud security as a code with automation in the provisioning of cloud security infrastructure as code, using CI/CD pipelines with Terraform, Jenkins, Puppet, and Ansible

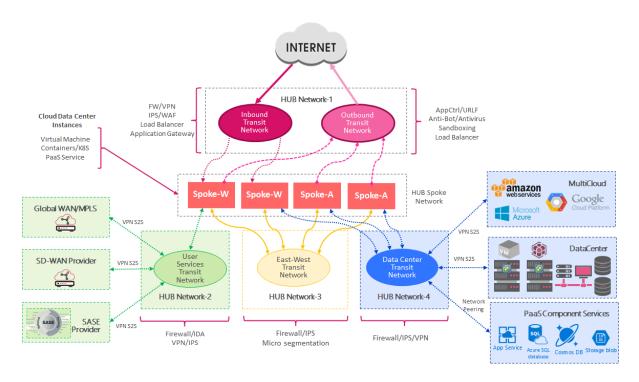


Figure 8: Transit Hubs-and-Spokes: Lift-and-Shift Optimized Model

In the lift-and-shift optimised model, we have four different types of hubs with different security functionalities:

A. Frontend Hub

Focused on providing communications to the public networks with two types of traffic: ingress and egress.

- The ingress perspective requires only access-control like the firewall and IPS with an SSL inspection mechanism, or web application and API protection.
- The egress perspective requires access-control for applications and websites. The common scenario is to provide secure internet access to the workloads to download fixes, patches, libraries, etc.

B. Data Center Extension Hub

Focused on providing communications from on-premises data centers and multicloud communications.

Access-control like firewall/VPN and threat prevention, integrating the IPS and antivirus for traffic inspection from on-premises to the cloud data center.

C. East-West Hub

Focused on all lateral traffic between different spokes.

- Access-control micro-segmentation: using the cloud-native access-control tools to provide basic firewalling capabilities to allow or deny specific services.
- Threat prevention micro-segmentation: using advanced traffic inspection capabilities, providing virtual patch management.

D. User or Shared Services Hub

Focused on interconnecting users from remote branches to the resources deployed in the cloud data center.

REFERENCE ARCHITECTURE FOR PUBLIC CLOUD IAAS

In Azure, we have the Transit Security Services Hub, which is focused on providing security services as a central point of connectivity for all ingress, egress, east-west and data center extension, multicloud peering and user traffic. This allows for a highly scalable and resilient design for large organizations. For example, ingress traffic should have dedicated auto-scale clusters in order to allow dynamic capabilities due to fluctuating throughput (similar scenarios that can be found in egress or east-west). In the case of the data center extension, we can deploy high-availability clusters for S2S VPN.

Organizations can choose their best strategy according to the analysis and classify the flows according to the following scenarios:

- Scattered applications
- Fluctuating throughput

Additionally, in AWS, we have the transit gateway that provides a shared resource to allocate the routing domains to distribute the traffic between different VPCs. A route domain is a conceptual group of VPCs and/or VPNs attached to a single route table. From a security perspective, this tool provides flexibility to distribute the traffic between ingress, egress, data center, multicloud and user traffic flows. Amazon Web Services provides a highly flexible capability to enable new cloud network architectures and replace many point-to-point peering connections.

Macro-segments and Micro-segments with Transit Security Hubs

In this reference architecture, which follows the hub-and-spoke principles, there are six macro-segments (security hubs) where traffic flows should be protected according to their respective behavior:

Macro-segments

- Frontend Security Hub: Traffic related to productive systems and public services (ingress) and traffic related to provide secure internet access (egress) for different spokes, for maintenance purposes (download patches, service packs, etc.)
- Data Center or Multicloud Traffic Security Hub: Traffic related to backhaul communications with the data center and multicloud
- Remote Branches or MPLS Security Hub: Traffic related to users and remote branches to access internal productive systems and corporate services

Cloud Security Management and Operations Security Hub: Traffic related to day-to-day operations in the cloud

Micro-segments

East-West Security Hub: Traffic-related to the intercommunication between different spokes.

Before starting the reference architecture explanation, it is essential to understand the equivalent terms between the cloud service providers.

Feature	aws	Microsoft Azure	Google Cloud Platform
Geography	Geography	Geography	Geography
Availability Zone	Availability Zone	Availability Zone	Availability Zone
Network	VPC	VNET	VPC-Cloud Virtual Network
Subnet	Subnet	Subnet	Subnet Network
Resources Management	Across Specific Account	Across Specific Subscription	Global, Regional, and Zone Specific Resources
Virtual Machine (VM)	Instance	Virtual Machine	Virtual Machine Instance
Image Type Format	AMI	VM Images	Public / Private / Custom Image
Public IP Addresses	Public / Elastic IP	Basic / Standard IP	Ephemeral / Static external IP
Load Balancing	Application / Network / Classic Load Balancer / ELB	Azure Load Balancer, Application Gateway	External Network and HTTP Load Balancing, Internal Load Balancing
Native Security / Security Groups	Security Groups / NACL	Network Security Group (NSG)	Computer Engine Firewall Rules
Scalable Computer Instances (Servers)	Elastic Computer Cloud (EC2)	Azure VM	Computer Engine
Domain Name System (DNS)	Route 53	Azure DNS or Traffic Manager	Cloud DNS
Network Address Translation (NAT)	NAT Gateways	NAT Gateways	Cloud NAT
Network Peering	VPC Peering Connections	Virtual Network Peering	VPC Network Peering
Network Routes / Routing	Route Tables	Azure Virtual Network Routing	Routes
Region	Region	Region	Region
Virtual Private Cloud (VPC)	Virtual Private Cloud (VPC)	Virtual Network (VNET)	Virtual Private Cloud (VPC)
VPC Endpoints	VPC Endpoints	Virtual Network Service Endpoint	Private Services, Private Google Access and/or Shared VPC
VPN Gateway	Virtual Private Gateway	Azure VPN Gateway	Cloud VPN
Object Storage	S3 Buckets	Blob Storage	Cloud Storage
Identity and Access Management (IAM)	Identity Access Management (IAM)	Azure Role-Based ACL (RBAC) or Azure AD	Cloud IAM
Content Delivery Network (CDN)	Cloudfront	Azure CDN	Cloud CDN or CDN Interconnect
Autoscaling	Auto-scaling group	VM Scale Sets	Computer Engine Autoscaler
API Endpoints	API Gateway	API Management	Cloud Endpoints


Table 1: Equivalent Terms Between Cloud Service Providers8

⁸ Overview - Cloud Feature Terms, URL: https://community.checkpoint.com/t5/Cloud-Network-Security-laaS/Overview-Cloud-Feature-Terms/m-p/85610

Security Gateways - Deployment modes

Single VPC/vNET Gateway

This is the most basic deployment to provide advanced security for small-to-medium workloads. This scenario does not provide high-availability or scalability capabilities. It should only be considered for environments where resilience is not a major concern, and for testing purposes.




Cloud Service Provider	Supported Scenario
Azure	Yes, sk109360
Amazon Web Services	Yes, sk120534
Google Cloud Platform	Yes, sk114577
Oracle Cloud Infrastructure	Yes,
Huawei	Yes
Alibaba	Yes

Figure 9: Single VPC with Single Security Gateway

High-Availability Cluster Single VPC/vNET

A high-availability cluster is a group of virtual machines that work together, where one cluster member is the active, and the second cluster member is the standby. The cluster failover from active cluster member to the standby cluster member when necessary. This scenario provides advanced security for the east-west traffic when regulatory require visibility and enforcement. Additionally, this is an excellent scenario for handling VPN traffic between clouds or backhaul communications to on-premises data centers, especially for high demanding traffic like database replicas.




Cloud Service Provider	Supported Scenario
Azure	Yes, sk109360
Amazon Web Services	Yes, sk120534
Google Cloud Platform	Yes, sk114577
Oracle Cloud Infrastructure	Yes, sk168202
Huawei	No
Alibaba	No

Figure 10: High-Availability Cluster Deployed in 1 Zone.

Two Gateways in Two Availability Zones, Single VPC/vNET

An availability zone is a high-availability offering that protects your applications and data from data center failures. Availability zones are unique physical locations within the cloud service provider regions, with each zone being made up of one or more data centers equipped with independent power, cooling, and networking systems. To provide an excellent resiliency, a typical design considers a minimum of three separate zones. Computing instances deployed and the security gateways in different zone-redundant services allow for the replication of applications and data across availability zones, protecting from SPOF (single-points-of-failure).




Cloud Service Provider	Supported Scenario
Azure	Yes, sk109360
Amazon Web Services	Yes, sk120534
Google Cloud Platform	Yes, sk114577
Oracle Cloud Infrastructure	Yes, sk168202 ⁹
Huawei	Yes
Alibaba	Yes

Figure 11: High-Availability Architecture Considering 2 Different Zones

Autoscale in Single VPC/vNET

Autoscale is a grouping of computing resources that you can use to deploy and manage sets of identical virtual machines (VMs). The scale sets increase or decrease the number of virtual machines based on current needs. This type of implementation is a perfect fit for workloads with fluctuating throughput, for example, public services



Cloud Service Provider	Supported Scenario
Azure	Yes, sk109360
Amazon Web Services	Yes, sk120534
Google Cloud Platform	Yes, sk114577
Oracle Cloud Infrastructure	No
Huawei	No
Alibaba	No

Figure 12: Autoscale Cluster with Security Gateways Distributed in Different Availability Zones


⁹ CloudGuard for Oracle Cloud Infrastructure (OCI) – URL: https://supportcenter.checkpoint.com/supportcenter/portal?eventSubmit_doGoviewsolutiondetails=&solutionid=s k168202&partition=Basic&product=CloudGuard

Autoscale with Transit vNET or Shared VPC for Ingress-Traffic

This scenario is focused on inspecting ingress traffic through transit or shared services VPC/vNET with autoscale capabilities with fluctuating throughput. The typical scenario is to deploy an external load-balancer for internet connections, process traffic by the security gateway and place SNAT to keep the traffic symmetric, after which routing can forward the traffic to the relevant VPC/vNET's through the peering.

Important to note is that in Amazon Web Services, we have the Transit Gateway where it is responsible for forwarding all traffic to the production VPC once the ingress VPC processes the traffic through TGW attachments.

Auto scale Cluster in Transit vNET/VPC for Ingress Traffic

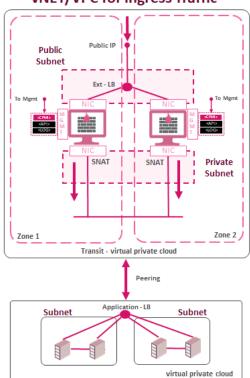

Cloud Service Provider	Supported Scenario
Azure	Yes, sk109360 ¹⁰
Amazon Web Services	Yes, sk120534 (through TGW ¹¹)
Google Cloud Platform	Yes, sk114577 ¹²
Oracle Cloud Infrastructure	No
Huawei	No
Alibaba	No

Figure 13: Autoscale Cluster for Ingress Traffic Using Transit or Shared Services VPC/vNET

https://supportcenter.checkpoint.com/supportcenter/portal?eventSubmit_doGoviewsolutiondetails=&solutionid=sk109360&partition=Basic&pr oduct=CloudGuard

¹⁰ Check Point Reference Architecture for Azure – URL:

¹¹ TGW – Transit Security Gateway – URL: https://docs.aws.amazon.com/vpc/latest/tgw/tgw-vpc-attachments.html


¹² Check Point CloudGuard laaS reference architecture for Google Cloud Platform – URL:

https://supportcenter.checkpoint.com/supportcenter/portal?eventSubmit_doGoviewsolutiondetails=&solutionid=sk114577&partition=Basic&pr oduct=CloudGuard

Autoscale with Transit vNET or Shared VPC for Egress and East-West Traffic

This scenario inspects egress traffic through transit or shared services VPC/vNET with autoscale capabilities with fluctuating throughput. Typical scenario is to deploy the internal load-balancer for internet connections, process the traffic by security gateway and place SNAT for public IP address. Additionally, it is possible to inspect eastwest traffic between different vNET or VPC. This scenario should be used for small or medium environments where the egress traffic cannot share the gateway with the east-west.

Auto scale Cluster in Transit vNET/VPC for Egress/E-W

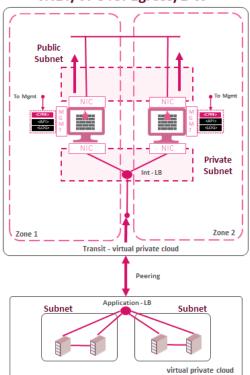

Cloud Service Provider	Supported Scenario
Azure	Yes
Amazon Web Services	Yes, sk120534 ¹³ . TGW ¹⁴ VPN with ECMP
Google Cloud Platform	Yes
Oracle Cloud Infrastructure	No
Huawei	No
Alibaba	No

Figure 14: Autoscale Cluster for Ingress Traffic Using Transit or Shared Services VPC/vNET


¹³ CloudGuard for AWS - Transit VPC Architecture – URL: https://supportcenter.checkpoint.com/supportcenter/portal?eventSubmit_doGoviewsolutiondetails=&solutionid=sk120534&partition=Basic&pr oduct=CloudGuard

¹⁴ TGW – Transit Security Gateway – URL: https://docs.aws.amazon.com/vpc/latest/tgw/tgw-vpn-attachments.html

Autoscale with Transit vNET or Shared VPC for East-West Traffic ONLY

This scenario focuses on inspecting different vNET or VPCs (east-west traffic), while providing autoscale capabilities processing fluctuating throughput. The internal load balancer is deployed to process the traffic between the vNETs with no connection to the internet (this scenario applies to Azure). However, in AWS, we can use the Geo-Cluster configuration or TGW Appliance Mode¹⁵ to provide advanced capabilities. Google provides east-west to inspect traffic between VPC or internal subnets – please refer to the sk114577¹⁶ for more use cases.

Auto scale Cluster in Transit vNET/VPC for E-W

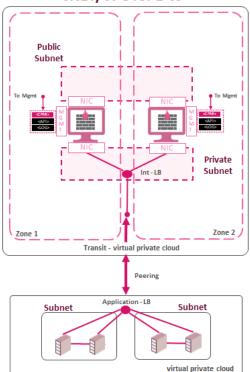

Cloud Service Provider	Supported Scenario
Azure	Yes ¹⁷
Amazon Web Services	Yes, sk120534 ¹⁸ Also, please refer to the Appliance VPC with TGW Appliance Mode
Google Cloud Platform	Yes, sk114577 ¹⁹
Oracle Cloud Infrastructure	No
Huawei	No
Alibaba	No

Figure 15: Autoscale Cluster with Security Gateways Distributed in Different Availability Zones

¹⁵ TGW Appliance Mode for Shared Services – URL: https://docs.aws.amazon.com/vpc/latest/tgw/transit-gateway-appliance-scenario.html

¹⁶ Check Point CloudGuard laaS reference architecture for Google Cloud Platform— URL:

https://supportcenter.checkpoint.com/supportcenter/portal?eventSubmit_doGoviewsolutiondetails=&solutionid=sk114577&partition=Basic&pr oduct=CloudGuard

¹⁷ Virtual Machine Scale Sets (VMSS) for Azure R80.10 and Higher Administration Guide – URL:

https://sc1.checkpoint.com/documents/laaS/WebAdminGuides/EN/CP_VMSS_for_Azure/Content/Topics-VMSS-for-Azure/Overview.htm 18 CloudGuard for AWS - Transit VPC Architecture – URL:

https://supportcenter.checkpoint.com/supportcenter/portal?eventSubmit_doGoviewsolutiondetails=&solutionid=sk120534&partition=Basic&pr oduct=CloudGuard

¹⁹ Check Point CloudGuard laaS reference architecture for Google Cloud Platform – URL:

https://supportcenter.checkpoint.com/supportcenter/portal?eventSubmit_doGoviewsolutiondetails=&solutionid=sk114577&partition=Basic&pr oduct=CloudGuard

Microsoft Azure Security Architecture

The transit hub is a virtual network in Azure that acts as a central point of connectivity to your on-premises network. Check Point CloudGuard NS security gateways act like security hubs or macro-segments, providing access control and threat prevention capabilities. Spokes are virtual networks that peer with the transit hub, and can be used to isolate workloads. Traffic flows between the on-premises data center and the transit hub through ExpressRoute or VPN gateway connection, implementing traffic inspection with the intrusion prevention system. Workloads deployed in different environments, such as development (dev), testing (QA or pre-prod), and production (prod), require shared services such as DNS, NTP and security (e.g. firewalls, IPS, WAF/WAAP, directory services, SIEM) that can be placed in a specific functional spoke (e.g. operations and, management vNET) or the transit hub virtual network.

Each environment can be deployed as a functional spoke to maintain isolation. For example, workloads located in the frontend (production) or backend vNET (production, development, or QA) will use different security services, therefore access to shared services provides great flexibility, scalability, and better distribution of the responsibilities between the teams. As best practice, production workloads are restricted to have connectivity to each other (micro-segment) provided by network security groups (NSGs), and require access to shared services through the transit hub (macro-segment). Under this approach, the security hubs provide central control in the transit hub, offering better isolation according to the traffic flows between workloads and traffic inspection.

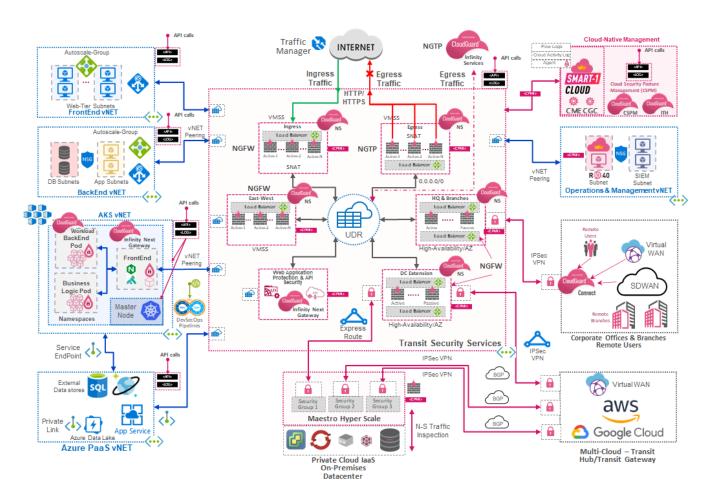


Figure 16: Reference Architecture for Microsoft Azure

Public cloud laaS is used in several cases. Under this approach, it is important to understand different behaviors relating to the organization's needs, including:

- Hosting complex websites
- High computing performance
- Program ttesting and development
- Disaster recovery or backup solutions
- Big data analysis

Below are the top use cases for CloudGuard NS for Microsoft Azure:

1. Ingress and Egress Hub

1.1. I2V: Internet to vNET

Ingress traffic for public services or corporate users. This is the most common scenario for organizations where the access-control (firewall) and threat prevention (IPS, web application and API protection, and inbound SSL inspection) are considered to protect the workloads. Traditional monolithic traffic inspection should be replaced for a rule-based approach, providing only protection for relevant ingress traffic.

1.2. V2I: vNET to the Internet

- 1.2.1.Egress traffic to allow workloads to securely access the internet, usually to allow the download of patches, service-packs, etc. The main focus of this traffic flow is for maintenance purposes. Mixing with the ingress traffic is only recommended in cases where the number of workloads requiring secure internet access is considerable. Additionally user traffic should not be placed here.
- 1.2.2.Internal segmentation done by NSG

2. Data Center Extension Hub

2.1. D2V: Data Center to vNET

This traffic is related to communications between on-premises data center to specific functional vNETs. Common scenarios include the data base replicas where accesscontrol and simple traffic inspection (for normalization purposes) may be required.

2.2. C2C: Cloud to Cloud

This traffic is related to multicloud communications between different cloud service providers. For example, peering communications between Amazon Web Services, Google, Oracle, or Huawei. This case is commonly used for database replicas, sharing information between APIs.

3. East-West Hub

3.1. V2V: vNET to vNET - East-West Access Control

This traffic is related to the communication of several workloads. Access control only provides the isolation to prevent communications between them with basic protection against lateral attacks. Using network security groups is the best option here. However, it is important to use cloud security posture management tools to validate that all configurations and segmentation have been done properly.

3.2. V2V: vNET to vNET - East-West Threat Prevention

This traffic is related to the communication of several workloads where traffic inspection is required to provide more advanced capabilities like intrusion prevention or Antibot. This approach should be used only for specific requirements, not for all the internal traffic.

4. Remote Branches and Users Hub

4.1. B2V: Branch to vNET

This traffic is related to the communications from remote branches to access specific services located in the functional vNETs (frontend or backend) for corporate applications or virtual desktops

4.2. VW2V: Virtual WAN to vNET

This traffic is related to global peering between different regions where organizations needs to deploy several cloud data centers to access corporate applications.

4.3. B2I: Branch to Internet

This traffic is related to secure internet access for the remote branches; it can also be categorized as egress traffic. However, the main difference from the frontend hub is that this traffic is more related to users and used only for specific scenarios.

For all the scenarios, it is important to note that there is a direct correlation between concurrent connections (CC), connections-per-second (CPS), and packets-per-second (PPS), as each cloud service provider has "rate-limits" defined per computing instance. Traffic flow analysis should therefore be done before the migration process to ensure the use cases and the right configurations are applied properly.

Amazon Web Services (AWS) Security Architecture

Check Point CloudGuard for AWS easily extends comprehensive threat prevention security to the AWS Cloud and protects assets in the cloud from attacks, while at the same time enabling secure connectivity.

CloudGuard NS lets you enforce consistent security policies across your entire organization. It protects data between the corporate network and the Amazon Web Services VPC (Virtual Private Cloud). CloudGuard NS inspects data that enters and leaves the private subnet in the VPC to prevent attacks and mitigate data loss or leakage. CloudGuard NS protects services in the public cloud from the most sophisticated threats, unauthorized access, and prevents application layer Denial of Service (DoS) attacks.

Check Point CloudGuard NS for AWS meets organizational cloud security needs in the following ways:

- Automatically deployed tag-based IPsec VPN between AWS Transit Gateway and the security VPC
- Automatic configuration of AWS VPN Gateways on spoke VPCs. This includes planning of IP addresses to prevent subnet IP address conflicts
- Next Generation firewall with application control, data awareness, HTTPS inspection, NAT, and logging
- IPS and virtual patching of cloud resources
- URL filtering for internet-bound traffic
- Anti-bot and anti-virus, and zero-day threat emulation and threat extraction
- Remote access VPN to connect remote clients
- IPsec VPN for VPC-to-VPC, and VPC-to-on-premises connections with optional direct connect support
- High availability deployment.

AWS Transit Gateway (TGW) connects VPCs and on-premises networks through a central hub, simplifying the network designs and eliminating complex peering relationships. TGW acts as a cloud router where each new connection is only made once. Integrating the security gateways with TGW, Check Point can deliver very comprehensive security for cloud workloads and assets with VPC perimeter security services. Other benefits include seamless security segmentation between VPCs, and automatically established IPsec VPN connectivity between cloud environments.

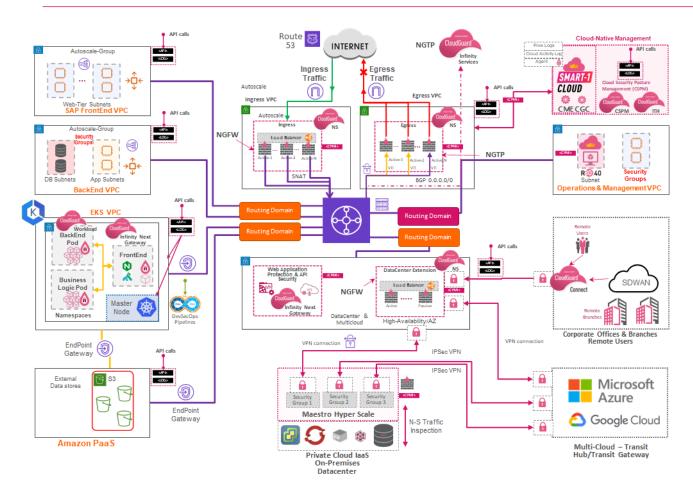


Figure 17: Reference Architecture for Amazon Web Services

The diagram above shows Transit Gateway architecture for Check Point CloudGuard AWS, an end-to-end solution that includes:

- Amazon Web Services Transit Gateway (TGW) object
- Spoke (consumer) VPCs attached to the AWS Transit Gateway with their routing domains
- Ingress security VPC with CloudGuard security gateways auto scaling group, attached to the AWS Transit Gateway
- Egress security VPC with the CloudGuard Transit Gateways auto scaling group
- Automatic provisioning of VPN tunnels
- BGP routing configuration between the AWS Transit Gateway and the CloudGuard NS security gateways
- Corporate VPN between on-premises perimeter and the AWS.

For higher demands in traffic and to provide a more centralized approach for shared services, similarly to the transit hub in Azure, the TGW has the capability to configure an appliance (such as a security appliance) in a shared services VPC. This scenario provides the scalability and flexibility required when traffic demands grow. To facilitate the growth, traffic is routed between Transit Gateway attachments after first being inspected by the appliance in the shared services VPC, which provide excellent flexibility and scalability for the growing demands of huge cloud data centers.

Once the security management server and shared security hub are deployed, every new or existing VPC that is specifically tagged is automatically configured to route all traffic, providing a more simplified way of deployment. For more complex environments where BGP should be considered, traffic is routed via an AWS managed VPN gateway into the security hub. The VPN gateways are also added as IPsec interoperable devices. The gateways are added to the automatically established route-based VPN process, (powered by Border Gateway Protocol (BGP)), to propagate network route changes to on-premises and in-cloud tenants.

Additionally, Amazon Web Services launched the GWLB (Gateway Load Balancer0, that combines the functionality of a L3 gateway and a L4 load balancer, allowing organizations to transparently insert virtual network appliances security gateways for deep packet inspection.

The following diagram explains the flows and functionality of the GWLB and the Security Gateways fleet...




Figure 18: AWS Gateway Load Balancer- Flow and Functionality (source: Amazon Web Services)20

Traffic that would otherwise flow from source directly to destination is routed to the GWLB using route tables. GWLB has a frontend, which faces the traffic source and destination, and operates in bump-in-the-wire mode, acting as the next-hop gateway, with no packet rewrite.

GWLB's backend, which faces the fleet of virtual appliances, operates as a load-balancer for routing traffic flows to and from one of multiple equivalent target appliances. GWLB ensures stickiness of flows in both directions to target appliances, performs regular health checks of the appliances, and reroutes flows if the selected appliance becomes unhealthy.

GWLB receives a traffic packet, processes it at layer 3, encapsulates it with a Geneve protocol (Generic Network Virtualization) encapsulation and sends it to the appliance without any change to the original traffic packet (also known as "packet-in, packet-out"). This is in order to achieve transparent forwarding. It is important to explain an additional component of GWLB: the GWLB Endpoint (GWLBE). The GWLBE (one GWLBE per VPC) behaves as

²⁰ Amazon Web Services Gateway Load Balancer – URL: https://aws.amazon.com/elasticloadbalancing/gateway-load-balancer/

a mirror image of a GWLB's frontend, thus acting as the next-hop gateway for each subnet that needs traffic inspection, different from the VPC that hosts the corresponding GWLB. Thus, the GWLBE enables deploying multitenanted traffic filtering service in a Service Provider VPC (different from the VPC/s of the GWLBE/s).

The diagram below shows a simple architecture with GWLBE.

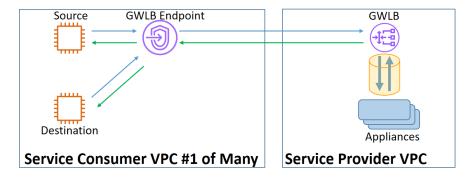


Figure 19: Access via GWLBE (source: Amazon Web Services)

Considering the Zero-Trust principles, GWLB thus allows organizations to design fault-tolerant architectures in an easier and more intuitive way, specifically regarding the addition of multiple virtual appliances and functional Service Provider VPC. This approach allows the organization, specially the IT and Networking teams, to maintain consistent security practices between in-cloud and on-premises deployments providing a huge benefit leveraging the existing skill-set of security engineers who understand and trust Cloud Guard Network Security virtual appliances with NGFW or NGTP.

Below, are the top use cases for CloudGuard NS for Amazon Web Services:

1. Transit Gateway

1.1. Acts as a regional virtual router for traffic flowing between all virtual private clouds (VPC) and VPN connections. The Transit Gateway scales elastically based on the volume of network traffic. Routing through a Transit Gateway operates at layer three, where the packets are sent to a specific next-hop attachment, based on their destination IP addresses.

1.2. Functionalities

- 1.2.1. AWS Transit Gateway (TGW) is a cross-account, per-region service available to VPCs and VPNs in those regions.
- 1.2.2. AWS Transit Gateway (TGW) Route Tables the dynamic and static routes that decide the next hop for VPCs/VPNs based on the destination IP address. AWS Transit Gateway (TGW) comes with one default table. There is an option to add many route tables.
- 1.2.3. AWS Transit Gateway (TGW) Attachment AWS Transit Gateways (TGW) can have VPCs or VPNs as attachments. A VPC or VPN can be attached to one or more AWS Transit Gateways (TGW).
- 1.2.4. AWS Transit Gateway (TGW) Route Domain similar to virtual routing and forwarding (VRFs) in traditional networks, a route domain is a conceptual group of VPCs and/or VPNs attached to a single route table.
- 1.2.5. AWS Transit Gateway (TGW) Appliance Mode All traffic routed between Transit Gateway attachments is first inspected by the security stateful appliance in the shared services VPC.
- 1.2.6.AWS Gateway Load Balancer (GWLB) It makes easy to deploy, scale, and manage your thirdparty virtual appliances. It gives you one gateway for distributing traffic across multiple virtual appliances, while scaling them up, or down, based on demand. This eliminates potential points of failure in your network and increases availability.

1.3. Scenarios for Deployment:

- 1.3.1.Inter-Account Communication
- 1.3.2.Inter-Region Communication
- 1.3.3.On-Premises Data Center to AWS Cloud Communication
- 1.3.4. Multicast Communication

2. Frontend Hub

2.1. I2V: Internet to VPC

Ingress traffic related to public services for customers or corporate users, is the most common scenario for organizations where the access-control (firewall) and threat prevention (IPS, web application and API protection and inbound SSL inspection) are deployed. Traditional traffic inspection should be replaced by a rule based approach, providing protection only for relevant traffic, for better performance.

2.2. V2I: VPC to the Internet

Egress traffic to allow workloads to securely access the internet, to allow download of patches, servicepacks, etc. The main focus of this traffic flow is for maintenance purposes. It is not recommended to mix with the ingress traffic, except if the number of workloads that requires secure internet access is considerable. Additional user traffic should not be placed here.

3. East-West Hub

3.1. V2V: VPC to VPC - East-West Access Control

This traffic is related to the communication of several workloads. Access control only provides the isolation to prevent communications between them with basic protection against lateral attacks. Using network security groups is the best option here, however, it is important to use cloud security posture management tools to validate that all configurations and segmentation have been done properly.

3.2. V2V: VPC to VPC - East-West Threat Prevention

This traffic is related to communications of several workloads where traffic inspection is required to provide more advanced capabilities like intrusion prevention or anti-bot. This approach should be used only for specific requirements and not placed for all the internal traffic.

4. Remote Branches and Users Hub

4.1. B2V: Branch to VPC

This traffic is related to communications from remote branches to access specific services located in the functional VPCs (frontend or backend) for corporate applications or virtual Desktops

4.2. B2I: Branch to Internet

This traffic is related to secure internet access for the remote branches. It can also be categorized as egress traffic, however, the main difference to the frontend hub is that the traffic is more related to the users, and used only for specific scenarios.

5. Data Center Extension Hub

5.1. D2V: Data Center to VPC

This traffic is related to communications between on-premises data-center to specific functional VPCs. A common scenario is the database replicas where access-control and simple traffic inspection (for normalization purposes) may be required.

5.2. C2C: Cloud to Cloud

This traffic is related to multicloud communications between different cloud service providers. For example, peering communications between Amazon Web Services, Google, Oracle or Huawei. This case is commonly used for database replicas, sharing information between APIs.

USE CASES

In this section, we will discuss the scenarios in more detail using the reference architecture blueprints for Azure and Amazon Web Services, as well as the following use cases:

- Ingress
- Egress and East-West
- Data Center and Multicloud
- Remote Access and Virtual Desktop Infrastructure with SASE

The following diagram shows the vNETs in which the "lift-and-shift" infrastructure is located.

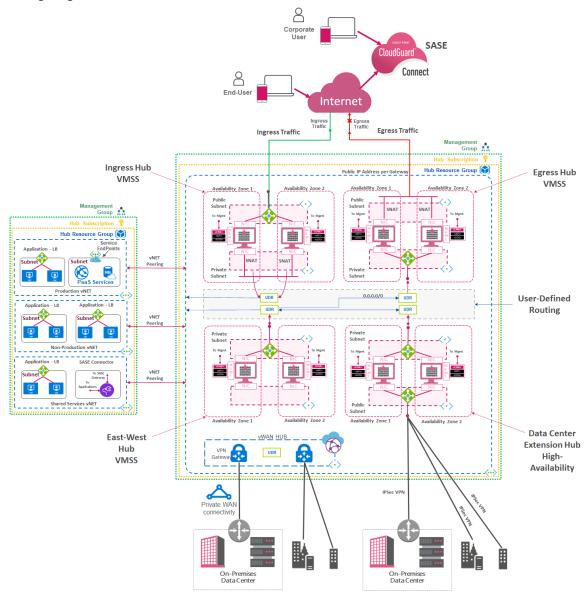


Figure 20: Transit Security Services Hub - Reference Architecture for Microsoft Azure

The reference architecture for Amazon Web Services also has the ingress and egress hubs for the public services. This includes the relevant security gateways and their security policies, as well as the east-west, or the data center, backhaul hubs. The Transit Gateway is located in the middle of the diagram, displaying the routing domains. Using

this approach, in AWS we have a similar architecture that allows a highly scalable, flexible and distributed architecture.

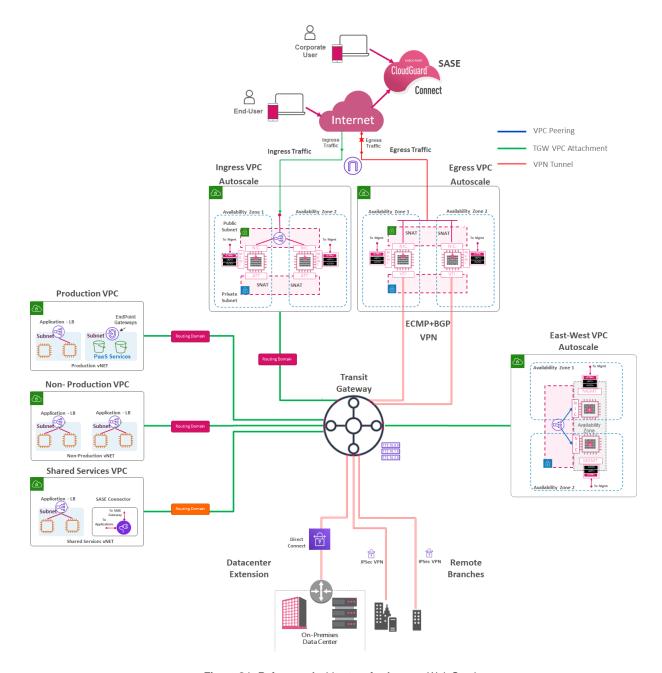


Figure 21: Reference Architecture for Amazon Web Services

Ingress Traffic to the Public Cloud

This traffic is related to the production systems and services, with the common scenario being the publishing of web servers. There are three different paths for this purpose:

- Ingress traffic for workloads using the traditional three-layer approach
- Ingress traffic for web applications provided by PaaS.
- Ingress traffic for containers acting like web servers to provide highly dynamic services

The following is an example for Azure:

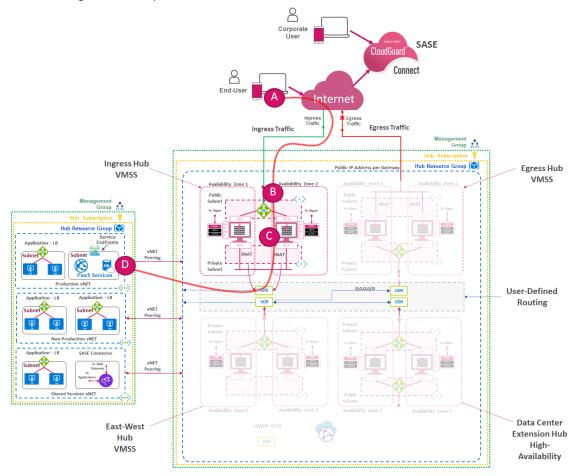


Figure 22: Ingress Traffic Flow Between Transit Security Services Hub and Production Hubs

As previously discussed, a Transit Security Services hub is a virtual network (vNET) in Azure acting as a central point of connectivity for all cloud data centers. The following table explains how the ingress traffic works:

FROM	то
Traffic arriving from the internet ("A")	- Traffic for WebApp1 ("D") is sent to the public IP address ("B") allocated for that web application.
	- The Azure external load balancer ("C") is set up with an inbound NAT rule that forwards all HTTP (port 80) traffic arriving at that public address to the Check Point gateway's external private address (e.g. 10.0.1.10) on port 8081.
	- Traffic for WebApp2 ("B") is sent to the public IP address allocated for that web application.
	- The Azure external load balancer ("C") is set up with an inbound NAT rule that forwards all HTTP (port 80) traffic arriving at that public address to the Check Point gateway's external private address (10.0.1.10) on port 8082. The WebApp2 is located similarly to PaaS service where the service endpoint should be configured.
	The Check Point Security Gateway uses SNAT for:
	- From "A" to "D-WebApp1" → forward traffic arriving on TCP port 8081 to Web1 on port 80
	- From "A" to "D-WebApp2" → forward traffic arriving on TCP port 8082 to Web2 on port 80

A. Scale-In

A scale-in event occurs as a result of a decrease in the current load. When a scale-in event triggers, Azure autoscale designates one or more of the gateways as candidates for termination. The external load balancer then stops forwarding new connections to these gateways, and autoscale ends them. The Check Point Security management server detects that these CloudGuard NS security gateways are stopped, and automatically deletes the gateways from its database.

Note: We recommend you to have at least two security gateways for redundancy and availability purposes.

B. Scale-Out

A scale-out event occurs if the current load increases. When a scale-out event is triggered, Azure autoscale launches one or more new instances of the Check Point CloudGuard NS Security Gateways. The new instances of CloudGuard NS security gateways automatically run the Check Point First Time Configuration Wizard, and then reboots.

Throughout the scale-out, the Check Point Security management server detects that new instances of CloudGuard NS security gateways have been launched. The security management server then waits until the CloudGuard NS security gateways finish deploying. Afterwards, the security management server automatically:

- Initializes a Secure Internal Communication (SIC) channel with the CloudGuard NS security gateways
- Installs a security policy on the CloudGuard NS security gateways

After a security policy has been installed, the CloudGuard NS security gateways start to respond to health probes. The load balancer then starts to forward new connections to them. Finally, the newly created CloudGuard NS security gateways report their status and send logs to the Check Point security management server.

The following is an example for Amazon Web Services, for ingress traffic:

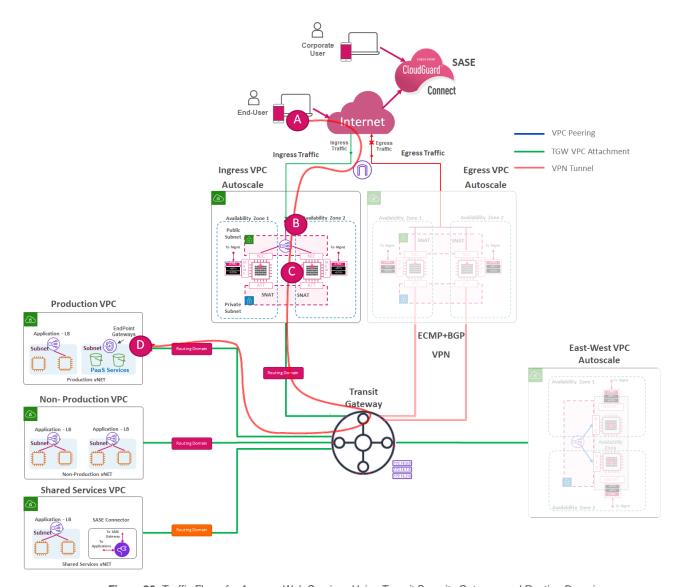


Figure 23: Traffic Flows for Amazon Web Services Using Transit Security Gateway and Routing Domains

For this scenario, the ingress VPC is available to process the traffic coming from internet "A", as external load balancers "B" forward the traffic to the relevant security gateways "C", which process the traffic, inspect it and SNATed to maintain the symmetric communications. The ingress VPC uses VPC peering "D" with production VPC to forward the traffic to the relevant computing instances. This architecture provides an efficient model simplifying the connectivity and keeping the functional security segmentation for the cloud data centers as it is aligned with the Zero Trust model.

Security policy for both scenarios (Azure and Amazon Web Services) should be focused per-flow, which means defining the protections according to the referred workloads, as well as defining the policies with the source, destination, services and relevant signatures, for the IPS. For example, a workload using Windows Server or Linux

Server and using Microsoft IIS or Apache Web server should be protected only by specific access-control, allowing the HTTP/HTTPS traffic and enabling the traffic inspection with the relevant signatures for the workload.

Under the traffic flow logic, the following diagram displays how a simple definition for the security policy can be used to protect the web servers.




Figure 24: Sample Policy for Ingress/Egress Controls Related to the Traffic Flows.

We have a similar approach in Amazon Web services, however, the architecture is quite different due to the Transit Gateway using the routing domains to provide an extra level of security, and delivering the traffic only to the relevant VPC. Transit Gateways support dynamic and static routing between attached VPCs and VPN connections. The route propagation for each attachment can be either enabled or disabled. Transit Gateway peering attachments support static routing only.

Egress Traffic

Egress traffic is commonly used to allow access to the computing instances in secure way that requires download patches, service packs, or upgrades only. It is important that this traffic is NOT focused on end-users, as this traffic is only used for maintenance purposes. It is also important to clarify that this traffic should not be confused with the "traffic return" in the ingress perimeters, as both flows are completely different.

Egress filtering controls the traffic attempting to leave the network in the vNET or VPC through the transit security hub or Transit Gateway. The filtering is therefore essential and focused on providing secure internet access to the computing instances located in the vNET or VPC. It is also used to help prevent outbound connections to dangerous and unwanted hosts by:

Disrupting malware

If one of the computing instances (virtual machines) located in the subnets on the vNET/VPC is infected with malware, then egress threat prevention policies can prevent it from connecting to the malware's command server. Also, if the malware tries to export the machine's data, the egress filter can prevent it from connecting to the destination.


Blocking unwanted services

In the cloud data centers, egress traffic is not focused on corporate users. As a consequence, users aren't allowed to browse the internet or chat using social network sites. An egress threat prevention security policy can also block the ports, protocols, applications, and URLs used to allow specific services for maintenance purposes or for other sites they are not allowed to access.

Stopping contribution to attacks

Egress threat prevention is also good at protecting the organization's reputation. By blocking certain types of traffic, it prevents the computing instances in the vNET/VPC being used for DDoS attacks, malware hosting, spamming, and botnets.

Before an outbound connection is allowed, it must pass the threat prevention egress policies. The following is an example for Microsoft Azure:

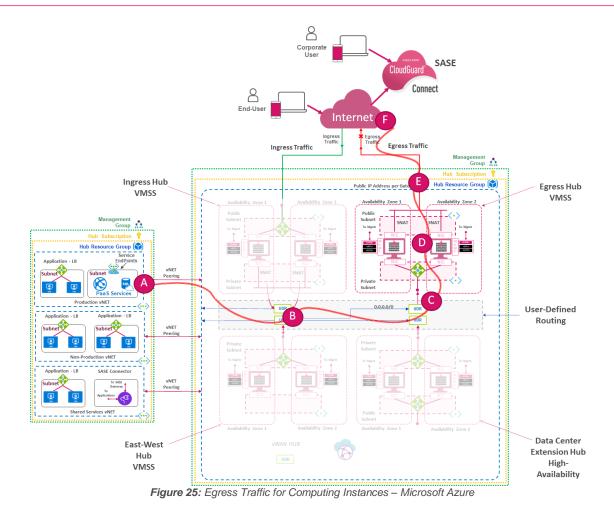

FROM TO Internal traffic ("A") is routed through the Check Point gateway Traffic from the backend using User Defined Routes (UDR) pointing to the internal load subnets to the internet (from balancer ("B") the traffic is then forwarded to the Security Gateway "A" and "D" to process and inspect it using rule-based threat prevention policies ("C"). The gateway uses SNAT ("D") to hide this type of traffic behind its external private address (10.0.1.10). As the traffic leaves the virtual network, Azure replaces the private address with the gateway's public address to access internet ("E").

A similar approach is focused on Amazon Web Services, however, the routing forwarding to the egress hub is handled by the Transit Gateway:

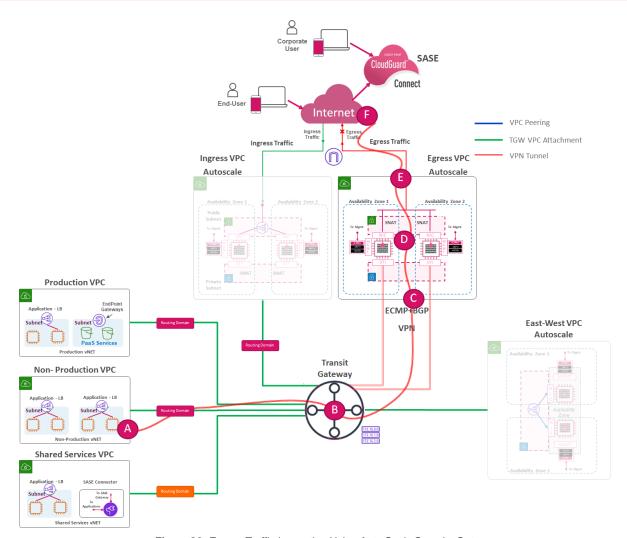


Figure 26: Egress Traffic Inspection Using Auto-Scale Security Gateways

In this scenario, the egress VPC has deployed the autoscale clusters with VPN attachments and eBGP for dynamic routing. To provide access to internet for all the production VPCs, the transit security gateway propagates the default route (0.0.0.0) in the route tables for the VPN connections. In this case we use VTI interfaces using ECMP (equal-cost multi-path), and BGP to provide peering detection for failover. Once traffic leaves the security gateway it is SNATed using dedicated public IP addresses per gateway.

As we discussed before, this scenario should be used for maintenance activities in the computing instances or allowing connectivity for reverse-proxies, no user-traffic should be placed here. If this use case will be used for VDI desktops to allow users access to the internet, it is highly advisable to use rule-based threat prevention (IPS, anti-bot, antivirus) and rule-based access control (application control and URLF) for specific sources.

East-West Traffic in the Public Cloud

East-west traffic is related to the communication between the production systems under the 3-tier architecture of the applications (web servers, application servers, and databases). Traffic can originate from a virtual machine, PaaS service, or container, and is destined to another virtual machine, PaaS service or container.

For east-west traffic, there are two different scenarios:

- Access-control
- Threat prevention

In some scenarios the workloads can communicate to each other without NAT policies due to all traffic being generated by private subnets, between different subnets. For that approach, the security groups provide the access-control capabilities for basic micro-segmentation to limit the communications between workloads.

CloudGuard enhances the native micro-segmentation and elastic networking of cloud environments to dynamically deliver advanced security and consistent policy enforcement that automatically grows and scales with your cloud environments. CloudGuard can easily secure workloads and applications running in hybrid and public cloud environments, thus mitigating risks from breaches, data leakage, and zero-day threats.

Security groups provide strong protection and allow for micro-segmentation, as they can be associated with a cloud object's network interface. However, they are limited to traditional layer 3-4 access control and are not a suitable option for "threat prevention". Security groups cannot recognize if a forbidden protocol is being tunnelled inside of an allowed one, or if traffic is truly clean SQL or something malicious (such as a SQL injection attack) riding the well-known SQL port. Security Groups also cannot allow or prevent access based on assigned metadata tags with values like "database servers" or "web servers".

Check Point therefore typically recommends internal segmentation and the use of "threat detection/prevention" solutions at the inside perimeter edge, that can monitor traffic moving between the internal network segments. This scenario should be used if the organization requires specific compliance requirements to have visibility and prevention in the network. Such a security solution can reside inside each host/instance and/or it can be inserted at the network level, considering the premises of the transit hub, Transit Gateway, or shared VPC.

The following diagram is an example for Microsoft Azure for traffic inspection in the east-west traffic:

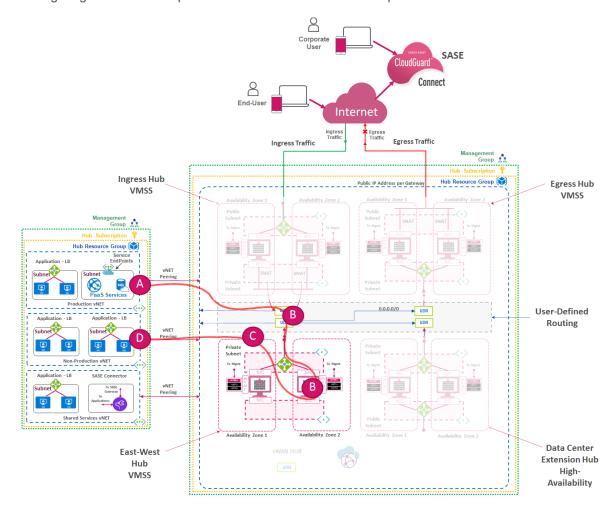


Figure 27: Threat Prevention for East-West Traffic Inspection – Azure

FROM	то
Traffic between the web and application tiers	- This traffic originates from computing instance ("A") and is routed through the Check Point security gateway through, the internal load balancer ("B"). Then traffic is inspected according to the flows through ("C") the use of User Defined Routes (UDR) to access the destination computing instance (Point "D").
	Note: this scenario is focused on providing east-west traffic inspection when the cloud data center has hundreds or thousands of virtual machines.
	- For his particular scenario, we do not recommended to mix the east-west traffic with egress traffic, as traffic inspection should be done according to security needs. Such needs should be aligned with the process of vulnerability and patch management, as well as with regulatory requirements.
	For trusted sources, such as database replicas, cloud-native networking security policies should be used instead of the traffic inspection, unless a regulatory requirement needs to be met.

A similar approach in Amazon Web Services, using routing domains, can be seen here:

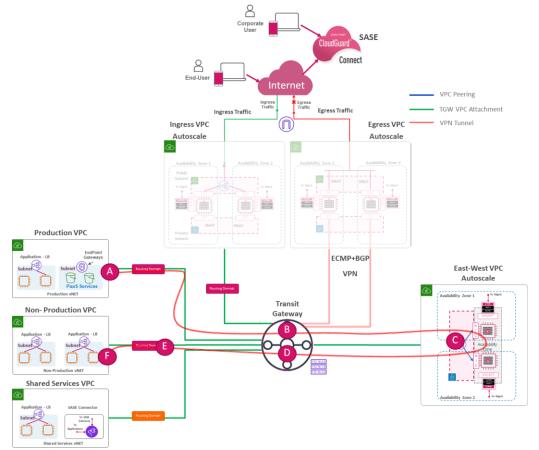


Figure 28: Threat Prevention for East-West Traffic Inspection – Amazon Web Services

In this scenario, for Amazon Web Services to provide east-west traffic inspection between the production VPCs, we can use the routing domains in the Transit Gateway to forward the traffic to the east-west VPC and inspect it. The east-west VPC can also be called the shared-VPC, where all security traffic inspection can be placed. The traffic can also be distributed in several security gateways, or auto scale clusters, allowing for a very flexible and scalable model for huge data centers.

As we discussed before, Amazon Web Services announced the AWS Gateway Load Balancer (GWLB) that makes it easy for customers to deploy, scale and manage multiple inline network virtual appliances for many networking purposes providing the following advantages:.

- · Reduced network complexity because there is no need for traffic translation (the original source and destination are not changed) and traffic inspection is transparent.
- Ease of use during and after deployment, because deployment can be completely automatic, and traffic inspection is enforced flexibility using subnet tags.

This new capability will enhance the requirements to inspect the east-west traffic simplifying the design of cloud architectures and allowing the organizations to design fault-tolerant architectures in an easier and more intuitive way, specifically regarding the addition of multiple virtual appliances.

In both scenarios for Azure and Amazon Web Services, East-West, or lateral movement security, is a pillar of the Zero Trust model. Zero Trust begins with the premise that a breach has already occurred (or that an internal threat is already present). Under such circumstances, internal perimeters are a must, because there is no possibility of an internal "trusted" zone. An east-west security policy that lacks deep packet threat inspection (versus access control only) can leave internal networks wide open to lateral propagation of malware after an initial breach.

Data Center on-premises Traffic to the Cloud

Another important use case is to allow communications to the data center and the cloud. This is a critical component due to organizations' need to enable replicas in the databases and application servers. In the following diagram, we can see different scenarios in the backhaul communications, and the different VPCs. For example, if we take a look at the flow of A to B, we will see that this is the most common scenario where replicas are originated from the on-premise data center. Using ExpressRoute or VPN site-to-site communicated in the data center "hub", this cluster of security gateways provides the capability of the access-control, however the value here comes from the rule-based traffic inspection. Considering the traffic flow, the IPS provides the capability of virtual patchmanagement and protects the communication between the cloud data center and the pn-premise data center.

For the data center we have two scenarios:

1) Cloud-native VPN communication without security gateways, east-west hub or shared services VPC, is used.

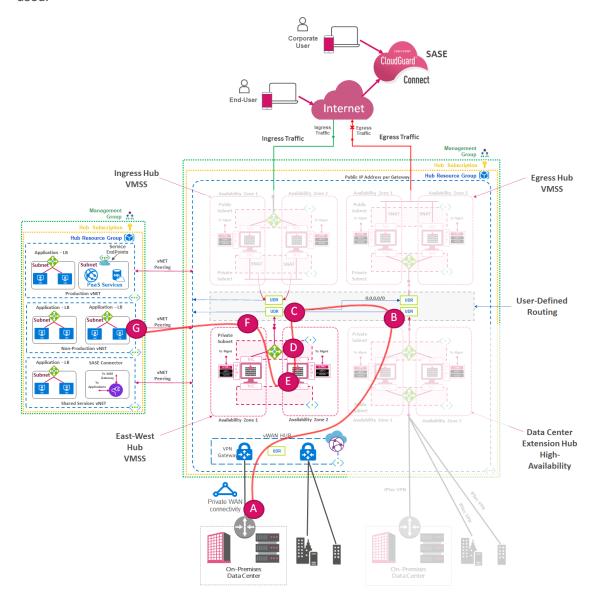


Figure 29: Data Center Communications to Public Cloud laaS Using Cloud-Native VPN Gateways - Microsoft Azure

Azure service endpoints allow Azure customers to keep data private, even if it is hosted in PaaS like Cosmos, SQL, etc. They allow VMs in the customer vNET (private address space) to access supported Azure PaaS services without traversing the internet. Service endpoints are usually enabled on the spoke vNET, and subnets close to the computer VMs. However, this means the traffic does not pass through Check Point.

CloudGuard NS which might be used a requirement for compliance, regulations, visibility, inspection of traffic, or controlling access to specific PaaS services from specific VMs. This can be achieved by deploying a Check Point CloudGuard NS solution in the environment, be it a single vNET, or a more complex hub-and-spoke topology. If service endpoints are already in use by the VMs, they will need to be disabled in their current location in the event of a cutover. The procedure is almost entirely based around Azure, with the only steps for Check Point being to add a rule accepting the traffic, and to verify that Hide NAT is configured.

FROM	то
On-premises data center (backhaul)	- Encrypted IPsec traffic is sent to the gateway's public IP address ("A").
	- The gateway decrypts the traffic and sends it into the virtual network ("B").
	- Another scenario is the database replicas ("C") or other outgoing traffic for B2B or data center that needs to be encrypted, is routed to the Check Point gateway through the use of User Defined Routes (UDR) ("D"). A similar approach we can find is for AKS services, where the containers can establish their egress traffic to the data center using the same path.
	The gateway encrypts this traffic and sends it over a site-to-site VPN tunnel to a Check Point gateway on the perimeter of the on-premises network.
	- Note: In normal conditions this traffic is encrypted end-to-end where we use inter-pod communications, however, the VPN tunnel allows the transport for this traffic, avoiding any connection to the internet.

2) Check Point security gateways for site-to-site VPN communication between the data center on-premises and the public cloud data center²¹.

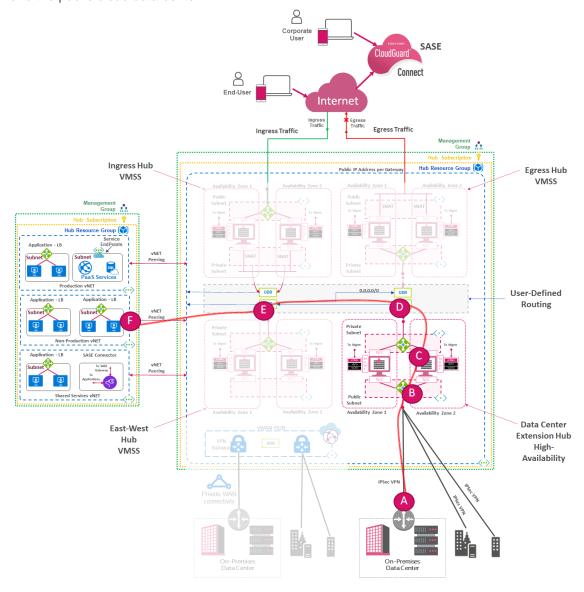


Figure 30: Data Center Connectivity to the Public laaS Cloud Data Center Using Check Point Security Gateway

In this case, a cluster is deployed in high availability mode: one cluster member is active, and the second cluster member is the standby. The cluster fails over from the active cluster member to the standby cluster member when necessary, and the cluster members communicate to each other with unicast IP addresses. Load balancers only forward traffic to the active cluster member. For VPN traffic between the data center on-premises and the public cloud data center, the load balancers (internal and external) use API calls to Azure to communicate the failover from the active cluster member. The standby cluster member then promotes itself to 'active'.

²¹ Virtual Machine Scale Sets (VMSS) for Azure R80.10 and Higher Administration Guide – URL: https://sc1.checkpoint.com/documents/laaS/WebAdminGuides/EN/CP_VMSS_for_Azure/Content/Topics-VMSS-for-Azure/Overview.htm

During cluster failover, the standby cluster member associates the private and public cluster IP addresses of the active cluster member with its external interface.

Encrypted IPsec traffic is then sent to the gateway's public IP address, where the gateway decrypts the traffic and sends it into the virtual network. Outgoing traffic that needs to be encrypted is routed to the Check Point gateway through the use of User Defined Routes (UDR). The gateway encrypts this traffic and sends it over a site-to-site VPN tunnel, to a Check Point gateway on the perimeter of the on-premises network.

Note: If the organization has express route and site-to-site VPN, we can use a similar approach following the recommendations located in the sk110993.

On the other hand, a similar approach can be seen in the Amazon architecture, where traffic is processed through the Transit Gateway to forward the traffic into the proper routing domain. For example, in a traditional infrastructure where we need to communicate the data center to the VPC with database computing instances; routing domain two forwards the traffic to routing domain one, and delivers it. In this hybrid cloud setup, customers can connect the on-premises data center and cloud environments, where all cloud assets can have secured access to onpremises assets. The connection is established via a secured VPN connection between your Check Point security appliance and a CloudGuard Gateway for AWS.

You can also implement a secure connection with AWS Direct Connect tunnels. For example, a front-end server in the cloud can connect to an on-premises backend database to retrieve confidential data or business logic.

To ensure automatic failover in the case of CloudGuard Network Security for AWS failure, or complete availability zone failure, the recommended architecture described in this document relies on BGP dynamic routing protocol established between the AWS VPN gateways, CloudGuard Network Security for AWS in the Transit VPC and the on-premises Security Gateway (if hybrid cloud is required). In case of such a failure within the Transit VPC, the converged components use BGP to detect the failure and update routing tables automatically to recover connectivity. This process may take some time (between a few seconds to a few minutes) depending on BGP configurations and region.

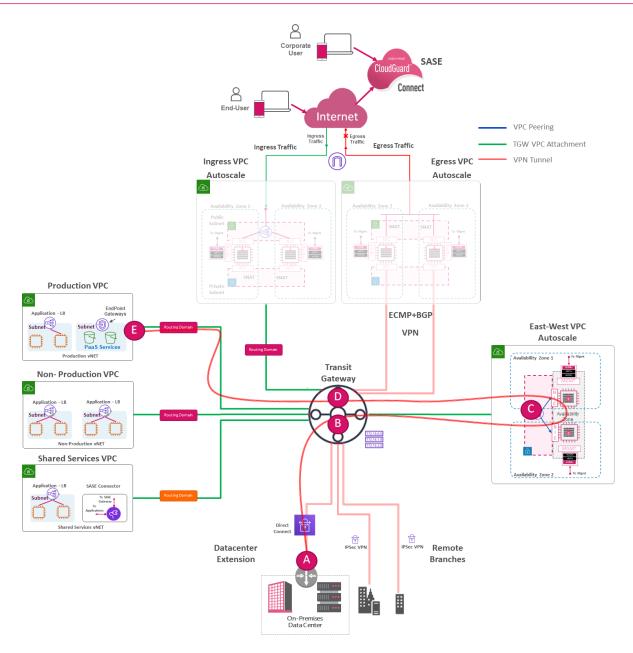


Figure 31: Backhaul Communications From data center on-premises to Different Services - Amazon Web Services

In the diagram above, we have illustrated the flows to connect the data center to the different production VPCs, and integrated the east-west VPC, or shared VPC. In this example the flow originated from the data center ("A") to the databases located in the cloud ("F"). Under this approach, traffic is transported over direct connect (between "A" and "B") and forwarded to the security gateway cluster called east-west hub (between "C" and "D"). Here traffic is allowed to the destination located in the production VPCs ("F"). Another common scenario is database replicas (flow "A" to "F") that can be configured in the routing domain to bypass the traffic inspection.

A third example is when the data center communicates to the PaaS or Kubernetes cluster: the flows are similar, traffic is allowed, inspected, and forwarded to the routing domain, and delivered to the endpoint gateway. The endpoint gateway is the component that allows us to communicate to the PaaS Services.

A VPC endpoint enables the private connection of the VPC to supported AWS services and VPC endpoint services powered by AWS PrivateLink. Such an endpoint doesn't require an internet gateway, NAT device, VPN connection,

or AWS Direct Connect connection. Instances in your VPC do not require public IP addresses to communicate with resources in the service, as traffic between the VPC and the other services do not leave the Amazon Web Services network.

Endpoints are virtual devices. They are horizontally scaled, redundant, and highly available VPC components, allowing communications between instances in your VPC and services without imposing availability risks or bandwidth constraints on your network traffic.

Remote Access to corporate resources using the Public Cloud (SASE)

Following the worldwide outbreak of COVID-19 in March 2020, remote access solutions has become a critical requirement for organizations. Under this approach, many workers have their own broadband connections at home with WiFi networks capable of supporting network speeds like those found in the office. This makes it possible for employers to leverage their workers' home networks for connectivity to the edges of corporate resources. However, home networks are often shared with family members, fully rely on untrusted public backbones, and can be entirely unprotected. Connecting remote employees to corporate systems therefore requires additional layers of security to ensure the confidentiality, integrity, and availability of corporate data and systems.

Under a new approach, Check Point's SASE strategy is to allow remote access communications without deploying traditional gateways in the public laaS. This new method facilitates for global coverage to be reached through proximity algorithms.

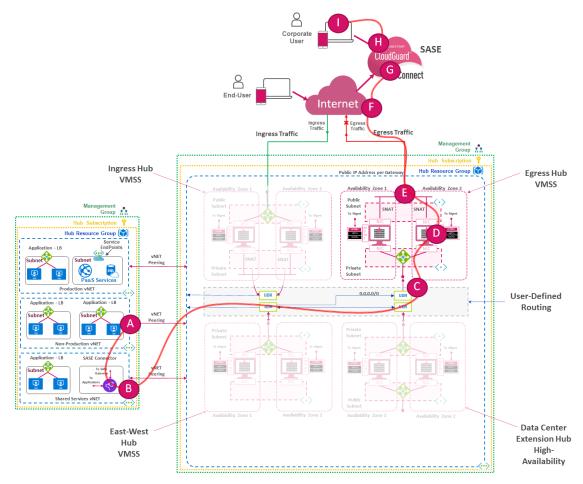


Figure 32: Remote Access Through Check Point SASE - Microsoft Azure

In the flow description visualized above, we can see that traffic originated from point A is located by external users with a client-based or clientless VPN. This traffic is terminated in the CloudGuard Connect for users where all traffic will be inspected and the posture security device confirms if the remote user can be considered as trusted. If the answer is 'yes', traffic is forwarded to the relevant computing instances (point B) through the Check Point SASE, peering to the public laaS data center to access specific services in PaaS (such as app services in point C) or services in the Kubernetes cluster.

FROM	то
Remote access traffic to cloud data center applications	- Remote access users ("A") connect to the CloudGuard Connect ("B") using its public IP address to access all the remote access services in the cloud access gateway.
	- The Check Point SASE connector ("C",acting as a reverse proxy) is located in the cloud data center and has the capability to connect to different applications located in the production vNETs. The reverse proxy also has connection to the internet through the egress traffic to the internet ("E") and is connected to the CloudGuard Connect services ("F")

Public cloud laaS integrated with a SASE framework has many advantages for organizations, the most important of which is how it helps adopters prioritize security, no matter what other tools they're using.

For example, if the business requires a transition between cloud service provider one to cloud service provider two,, the SASE platform continues undisrupted due to its platform agnostic. This flexibility also makes it easy for businesses to scale up their security infrastructure as they grow, without having to reconfigure the central architecture or deploy dedicated VPN Clusters in the public cloud data center. This ability to customize security setting operational needs enables organizations to create an architecture that meets their current and evolving business needs. It is important to keep in mind the following security and network components of a SASE architecture.



Figure 33: Check Point SASE Architecture²²

²² Check Point Remote Access – URL: https://docs.odo.io/docs/odoaccess-architecture

In this example for Amazon Web Services, we have a similar approach in the flow communications. However, the peering is done using VPN S2S communications between Check Point SASE and the Transit Gateway, in which the flow traffic is practically the same as any other spoke.

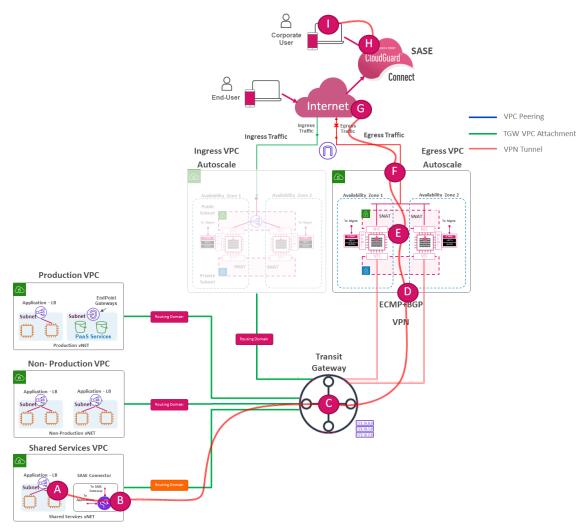


Figure 34: Remote Access Through Check Point SASE – Amazon Web Services

Remote Access and Windows Virtual Desktop (RDP)

In a similar approach, Check Point SASE can enable the environments with Windows Virtual Desktop or Virtual Desktop Infrastructure as a Service. Windows Virtual Desktop is a comprehensive desktop and app virtualization service running in the cloud. It is the only virtual desktop infrastructure (VDI) that delivers simplified management, multi-session Windows 10, optimizations for Microsoft 365 Apps for enterprise, and support for Remote Desktop Services (RDS) environments. You can deploy and scale your Windows desktops and apps on Azure in minutes, and get built-in security and compliance features.

One of the major concerns is the latency to deploy SASE Services located in different data centers worldwide. To provide a more optimized model, Check Point SASE can be complemented with Virtual Desktop infrastructures. In the following diagram, we can gain an overview of how the customer can access their cloud data center services using the WDI (the same approach could be done with VDI).

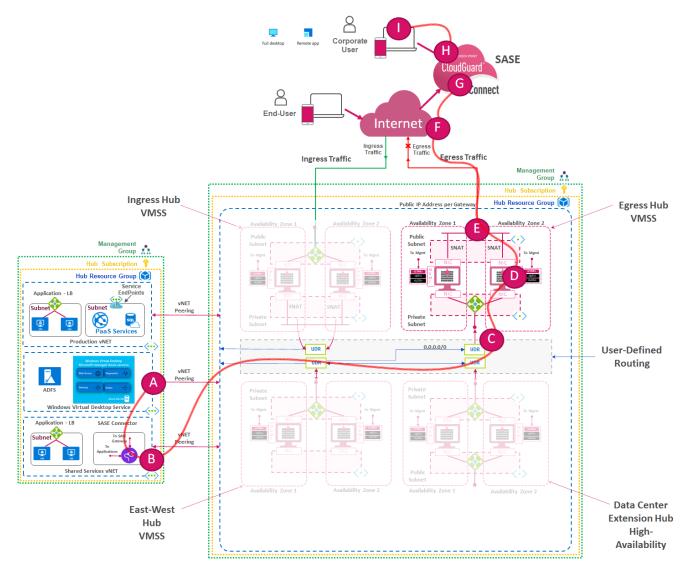


Figure 35: Secure Remote Access with SASE and WDI to the Cloud Data Center

FROM ТО Remote access users ("A") connect to CloudGuard Connect for Remote access traffic to cloud Users ("B"), using its public IP address. Check Point SASE service data center applications inspects the traffic and sends it to the internet or to the peering through Windows Desktop communications ("C"). This provides communication into the virtual Infrastructure network to access Windows Desktop Infrastructure (or another similar solution in "D"). Then, according to policies, remote users ("E") can access one specific application using the service portal or ull desktop. Under this approach computing execution is done in the user virtual environment, saving bandwidth and latency to access applications installed in the computing instances, PaaS web applications, or container applications. In this scenario, the routing is more simple and flexible, due to returning packets being managed internally between the WDI managed services and the peering to the functional vNETs. The only returning packets to warranty is the route back to the gateway through the use of User Defined Routes (UDR) for the thin client, and the WDI managed service. The reverse-proxy also has connection to the internet through the egress traffic to internet ("F") and is connected to the CloudGuard Connect Services ("G").

CONSOLIDATED CLOUD SECURITY MANAGEMENT

The entire security network is unified and efficiently managed through a single pane of glass, based on modular policy management and rich integrations with 3rd party solutions through flexible APIs. This consolidation brings all security protections and functions under one umbrella. A single console manages the entire IT infrastructure and a unified policy for users, data, applications, and networks that introduces unparalleled granular control and consistent security. The single console provides rich policy management, enabling delegation of policies within the enterprise, and flexible administration rights. In addition, the consolidated management increases operational efficiencies with the automation of routine tasks, freeing up security teams to focus on strategic security rather than repetitive tasks.

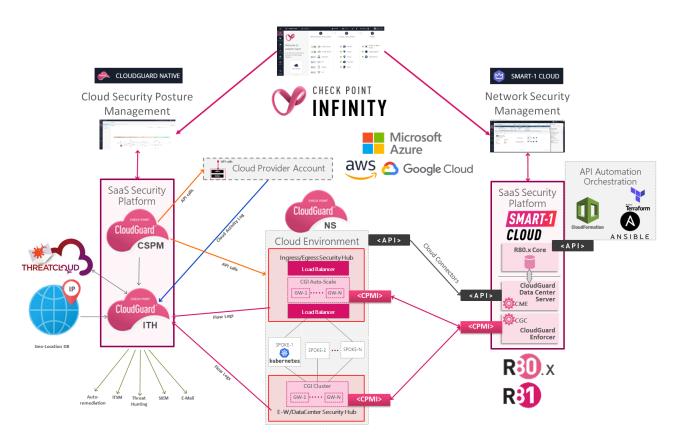


Figure 36: Consolidated Cloud Security Management Architecture

Cloud Network Security Management as a Service (Smart-1 Cloud)

Smart-1 Cloud is a new Software as a Service solution, and cloud-based management tool for organizations looking to unify all their security policies in the cloud. Instead of deploying and maintaining your own management server, it is now possible to connect to Check Point's new cloud service to manage all premise gateways or your CloudGuard NS gateways.

Key Benefits:

- Elastic growth As your company grows, your security management requirements grow as well. Our backend platform scales up according to your needs and enables you to add more capacity on demand
- Infinite logging There are no physical limits for scaling. Keep your security logs in the cloud for as long as you need with the required log rate, without compromising on the search and guery experience

- Always up-to-date Our service will always be up-to-date with the latest security features and software
- **Zero maintenance** No need for monitoring or backup operations of your security management system

Unified Management

A key component of the Check Point Infinity Architecture is the ability to present a single pane of glass for all required management. This means that all security management is consolidated into one place with one console; with no more back and forth between platforms to have full-spectrum visibility. A single view also means that organizations can present a consistent security policy over multiple platforms. The example below shows an R80.x/R81 policy, in which security is being enforced across the public and private cloud, as well as in the onpremises gateways.

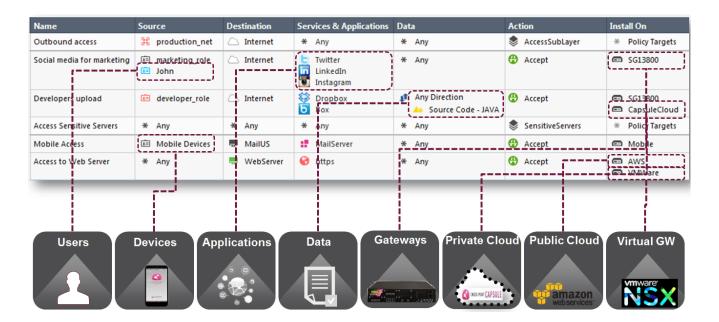


Figure 37: Full Security Policy for Different Realms: Users, Devices, Applications, Data, Gateways, Private/Public Cloud and Virtual /Environments

R80.x/R81 Unified Security Policy

The next-generation security management allows for the combining of firewall, application control, and data awareness in one "access control" rule base. All you need to do is edit your policy, edit the access control layer, and check all the relevant blades.

With that, your rulebase will have new columns available: "Services & Applications" and "Data". In the "Services & Applications", where you normally select the services in your firewall rulebase, you will also be able to select web applications, as well as mobile access applications. In the "Data" column you will be able to select individual data types, and the upload/download direction. Enforcement will then only apply to the granular selection of this rule. The "Track" column will also include options to include more information regarding the connection, with regard to the selected applications and data.

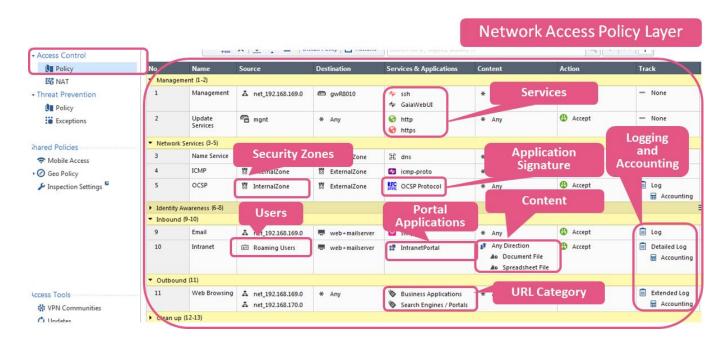


Figure 38: Unified Security Policy

Layers

R80.x/R81 introduced the concept of layers with a policy as a new way to organize security policies. Using layers gives various benefits. Key among these is delegation; the ability to assign different layers to different administrators. This feature can be used to provide separation between tenants in the event that they share a policy.

R80.x/R81 organizes the policy with ordered layers. For example, gateways that have the firewall and application control blades enabled will have their policies split into two ordered layers: network and applications. Another example is gateways that have the IPS and threat emulation blades enabled, will have their policies split into two ordered layers: IPS and threat prevention. Ordered layers are enforced in the following way: when the gateway matches a rule in a layer it starts to evaluate the rules in the next layer.

The layers concept opens more options for policy management:

- Setting different view and edit permissions per layer for different administrator roles
- Re-using a layer in different places: the same application control layer in different policy packages (sharing a layer across different policies), or the same inline layer for different scopes
- Explaining global and local policies in multi-domain with the same feature set of layers: a domain layer will be the set of rules added in each domain by the domain administrator.

R80.x/R81 gateways and above will have the ability to utilize layers in new ways:

- Unifying all blades into a single policy
- Segregating a policy into more ordered layers, not necessarily by blades
- Allowing sub-policies inside a rulebase, with the use of inline layers



Figure 39: Rule-Based Content Awareness Security

For the access control policy, two types of layers for maximum flexibility exist: the inline layer and the ordered layer, where layers allow for the separating of the security policy into multiple components. In this way, better security and manageability is created. Support of concurrent-admin and segregation of duties allow organizations to reuse layers either inline or ordered in multiple policies, to be more efficient.



Figure 40: Rule-Based Threat Prevention

- 1. In inline layers only traffic matched/accepted on the parent rule will reach and be inspected by the inside layer
- 2. In ordered layers when an accept rule from the first layer is matched, the gateway goes over the rules in the next layer.
 - 1.1. For backward compatibility with pre-R80 gateway, you will need to use ordered layers to manage the firewall rulebase and application control rulebase. This is where the first layer needs to be a firewall layer and the second layer needs to be an application control and URL filtering layer.
 - 1.2. During an upgrade from pre-R80 to R80 with gateways, using policy packages that are implementing firewall and application control policies, the existing policy will be separated by an ordered layer, with the network layer: the firewall policy rules as the first layer and application layer, and the application control policy rules as the second layer.

The following is an example of traffic matching using Policy Layers

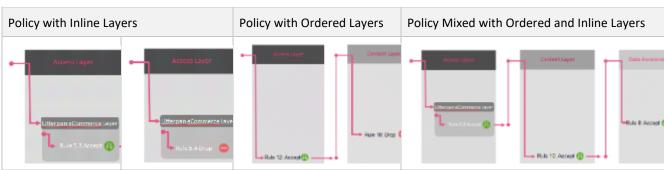


Figure 41: R80.x/R81 Policy Layers

Smart-1 Cloud answers the evolving needs of today's enterprise security management. By keeping up with the latest security, organizations can manage the latest threats across devices and workloads via a single management console in the cloud. They have the ability to scale and manage the increasing number of gateways as our environments grow, without having to worry about limited physical storage space or log storage capacity. Most importantly, they can effectively manage maintenance and save valuable time on onboarding new gateways, monitoring devices, and any new updates or hotfixes, as well as on facility power. This is all done automatically,, when you use Smart-1 Cloud.

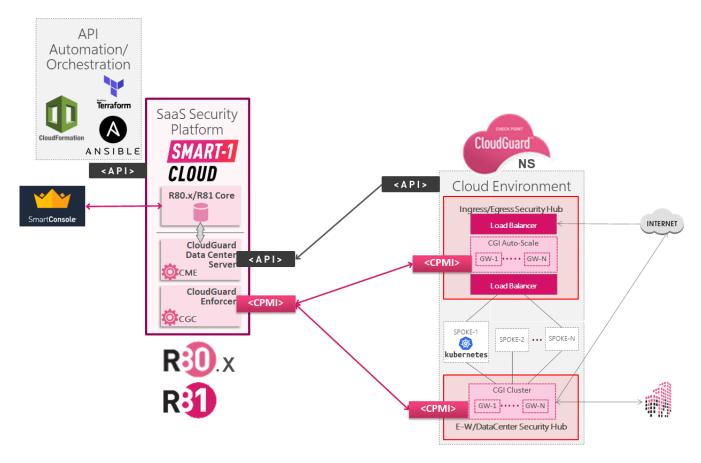


Figure 42: Smart-1 Cloud Architecture

CloudGuard Controller

Check Point CloudGuard integrates with all leading public cloud management solutions, to absorb and leverage contextual information about the infrastructure. Cloud-defined elements such as asset tags, objects, security groups, and more are updated in real time, allowing CloudGuard to automatically adjust security policies to any changes in your dynamic cloud environment. As enabler for cloud security operations, the organizations can create a unified and creative policy. The controller also allows for the simultaneous use of cloud objects like regions, availability zones, subnets and virtual machines in our policy, from different cloud platforms. By doing so, the cloud network security policy becomes more adaptive to the dynamic changes that occur in the cloud.

Overview of Cloud Management Extension (CME)

CME is a utility that runs on Check Point's security management server and multi-domain servers running Gaia OS. CME allows cloud-native integration between Check Point CloudGuard NS solutions and cloud platforms.

As a service that runs on Check Point management servers, CME continuously monitors CloudGuard NS solutions deployed in various cloud vendors and synchronizes them with the security management server.

Supported solutions and features for:

- CloudGuard for Azure VMSS
- CloudGuard for AWS ASG
- CloudGuard for GCP MIG
- Automatic Hotfix Deployment for autoscaling solutions
- CloudGuard for AWS Transit VPC
- CloudGuard for AWS Transit Gateway

Attributes:

- Management module
- Based on Check Point's identity awareness technology
- Allows the use of cloud-management defined objects (e.g. tags, security groups) within Check Point security policies
- Can be used independently of any CloudGuard gateways

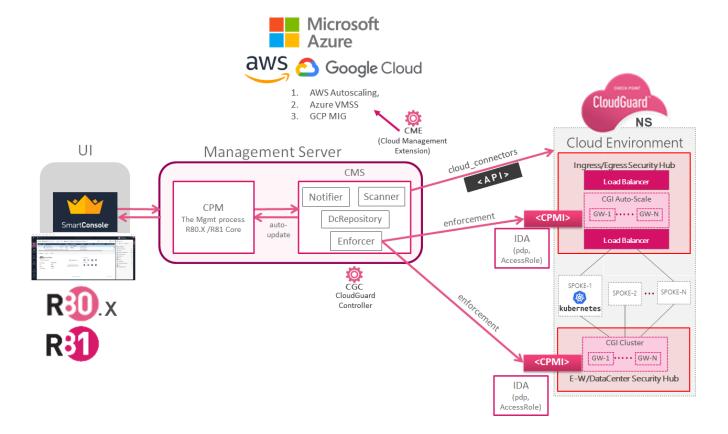


Figure 43: CloudGuard Controller Architecture

Check Point Smart-1 Cloud is Check Point's security management server delivered as a cloud service. Smart-1 Cloud provides security policy management of on-premises and laaS security gateways, security event analytics and reporting from a single user-friendly, web-based SmartConsole. Because it is delivered as a Software-as-a-

Service (SaaS), ramp-up time changes from hours to minutes when compared with on-premises deployments. Check Point provides the infrastructure and the software, ensuring installation, deployment, and maintenance times are eliminated and the latest software.

	Standalone	Open Server	Management Appliance	Smart-1 Cloud
Number of Managed Gateways	1	Static	Static	Scale on-demand
Deployment Time	+1 hour	+2 hour	+1 hour	< 2 mins
Troubleshooting	Complex, TAC + if appliance failure need RMA	TAC + hardware vendor support	TAC + if appliance failure need RMA	Part of service
Management Performance	Based on hardware utilization	Based on hardware size	Based on hardware size	Auto-scaled
Management High Availability	Additional hardware needed	Additional hardware needed	Additional hardware needed	Delivered from cloud

Figure 44: Smart-1 Cloud specifications

Smart-1 Cloud and Shared Responsibility

Smart-1 Cloud is available via the Infinity Portal, Check Point's one stop shop for all SaaS services. With zero installation, deployment, or maintenance, IT teams have more control and oversight over their entire Infrastructure. This makes their cloud-native, hybrid, and multi-cloud environments even more secure, manageable, and compliant.

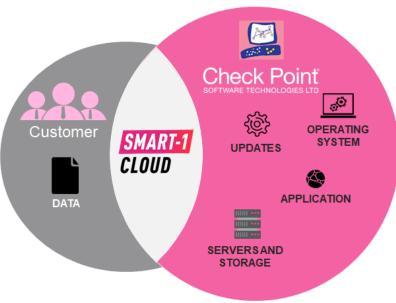


Figure 45: Smart-1 Cloud Shared Responsibility

Operational efficiency increases using cloud delivered management as Smart-1 Cloud environments are always up-to-date with the latest security. Smart-1 Cloud also leverages automatic tools to make sure the system is always up and running, with routine backups every 12 hours.

CloudGuard Security Posture Management

CloudGuard Security Posture Management, part of the CloudGuard Cloud Native Security platform, automates governance across multi-cloud assets and services. This includes visualization and assessment of the security posture, misconfiguration detection, and enforcement of security best practices and compliance frameworks. Cloud Guard CloudGuard Posture Management is a purpose-built security and compliance solution for cloud environments, providing network security policy management and automation for your cloud environment. Organizations trust CloudGuard Posture Management to ensure their network security is well defined and understood, and then to enforce the security policy on a continuous basis. In the case of an unauthorized change, (for example, somebody or something attempts to open network ports) CloudGuard Posture Management prevents the event, instead enforcing the configuration you have previously defined.

- Security Operations: Visualize assets, assess security posture, fix misconfigurations and threats, manage the cloud firewall, and enforce security from a single source of network authority.
- Privileged Identity Protection: Protect against compromised credentials and identity theft using a cloud's native IAM capabilities to safeguard access to actions that can have a big impact.
- Compliance and Governance: Manage the compliance lifecycle for standards such as PCI DSS, from automated data aggregation and assessment, to remediation and reporting.
- Cloud Security Intelligence: CloudGuard Threat Intelligence is a cloud-native security intelligence technology that delivers cloud intrusion detection, network traffic visualization, and user activity analytics.

Whether public or private clouds are in use, CloudGuard Posture Management facilitates management of server configurations ranging from a few dozen, to hundreds or thousands of instances. Its flexible security management tools ensure compliance while reducing configuration errors and potential breaches.

In the following diagram, the general architecture of Check Points's solution for Cloud Security Posture Management can be seen:

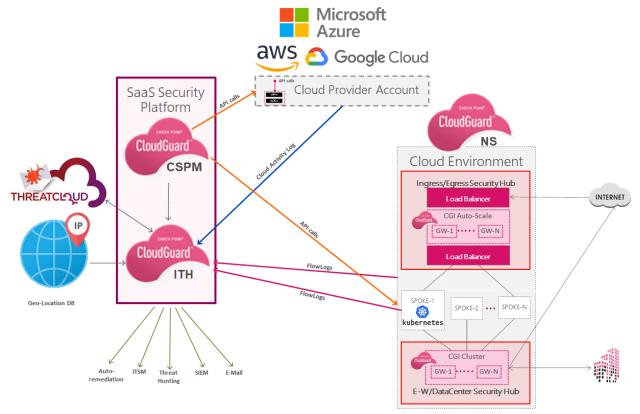


Figure 46: CloudGuard Security Posture Management Architecture

CloudGuard Security Posture Management (CSPM) can provide the following:

- Security Operations: Visualize assets, assess security posture, fix misconfigurations and threats, manage the cloud firewall, and enforce security from a single source of network authority.
- **Privileged Identity Protection:** Protect against compromised credentials and identity theft using a cloud's native IAM capabilities to safeguard access to actions that can have a big impact.
- Compliance and Governance: Manage the compliance lifecycle for standards such as PCI DSS, from automated data aggregation and assessment to remediation and reporting.
- Cloud Security Intelligence: CloudGuard Intelligence and Threat Hunting is a cloud-native security intelligence technology that delivers cloud intrusion detection, network traffic visualization, and user activity analytics.
- Workload Protection: Seamlessly integrate protections and controls into your CI/CD tools, like CloudFormation and Terraform, and evaluate security posture pre-deployment; scaling across hundreds of thousands of cloud assets.

CloudGuard Security Posture Management provides enriched vulnerability management findings to better identify, prioritize, and auto-remediate events based on public exposure, thus minimizing risk. It also prevents critical cloud security misconfigurations and will keep up with evolving posture management security and compliance best practices, including auto-remediation. CloudGuard also complies with regulatory and industry standards, such as HIPAA, CIS BENCHMARKS, NIST CSF/800-53, PCI-DSS, with the most contextual cloud security across 70+ native cloud services.

The following diagram provides the visual representation of all the connections and security relations between the virtual networks and assets.

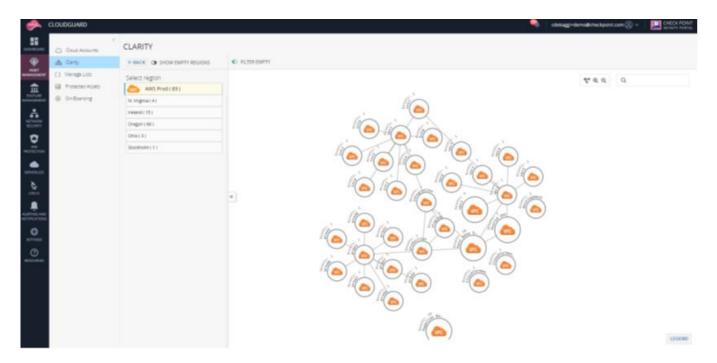


Figure 47: CloudGuard Cloud Security Posture Management: Network Security Flow Analysis

CloudGuard Intelligence and Threat Hunting

CloudGuard Intelligence and Threat Hunting takes vNET/VPC flow logs enriching data with threat cloud IOC information. As part of the supported services, it shows how the ECS service communicates with other services.

CloudGuard CSPM also provides the user with the ability to visualize the data flows and run GSL queries for immediate incident response and threat hunting purposes. After this is done, you can investigate and identify suspicious ECS related activity; proving investigation and threat analytics capabilities for ECS traffic.

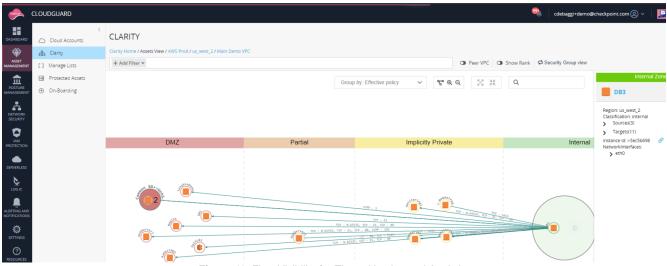


Figure 48: Flow Visibility for Threat Hunting and Analytics.

Infrastructure as Code assessment with CloudGuard CPSM and Terraform

CloudGuard protects across AWS, Azure, GCP and more with continuous security and compliance for your cloud environments. Now that same security can be integrated into CI/CD pipelines with Infrastructure as Code Security Capability for DevSecOps. Shifting Cloud security left into your CI/CD pipeline stops misconfigurations and policy violations from ever occurring. Instead of being forced to fix post-production, developers are notified of issues immediately. With lac security, API calls from the CI/CD pipeline tool insert CloudGuard ShiftLeft to scan the IaC template. CloudGuard analyzes the template for misconfigurations and policy violations. CloudGuard combines the analysis with any existing violations for a more complete risk understanding if the template connects to existing cloud resources. The result are quickly returned via API with customizable enforcement levels of Pass/Fail.

CloudGuard ShiftLeft can effectively define, provision, and manage the resources needed without needing the IT staff.

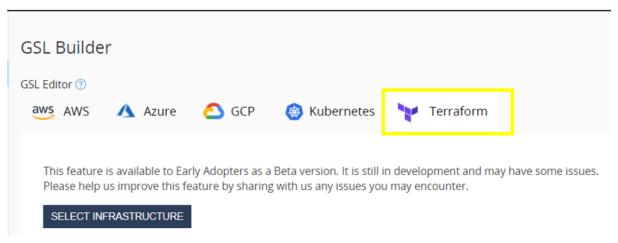


Figure 49: CloudGuard CPSM integrated with Terraform

The CloudGuard Terraform rulesets, based on various compliance frameworks, are applied to infrastructure-ascode plans. The plans are evaluated for compliance before being created and deployed in cloud accounts. Misconfigurations and other compliance issues are eliminated at source.

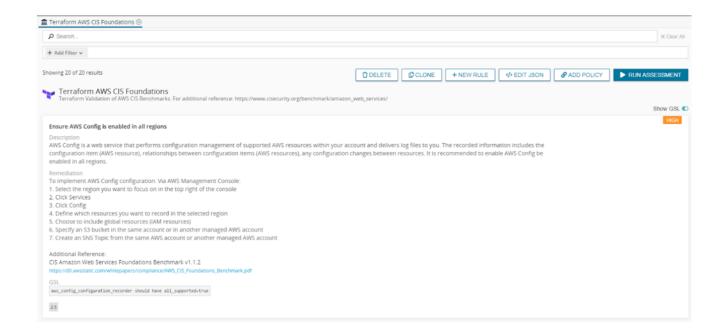


Figure 50: Terraform AWS - CIS foundations

The list of security risks for infrastructure as code platforms are extensive and includes network exposure, configuration drifts, and ghost resources. These risks must be considered as part of the development and testing of lifecycles. IaC scanning removes barriers for security by improving efficiency in software development, configurations, and speed.

CONCLUSION

The cloud transformation journey starts with Public IaaS transition as the next natural step for the organizations looking optimize and improve all their business processes. According with the MIT (Massachusetts Institute of Technology), "the cloud native approach focuses on building, running and deploying applications by integrating all the new advantages provided by Cloud technologies, such as on-demand delivery, flexibility, global deployment, productivity, agility, scalability and cost savings, among others."

Cloud-native zero-trust is shining a light on the path out of this journey to protect the data and information of the organizations, this is why Check Point CloudGuard provides unified cloud native security for all your assets and workloads, giving to the organizations the confidence to automate security, prevent threats, and manage posture across your cloud deployments.

In this Whitepaper, we discussed how Cloud Network Security is one of the CloudGuard capabilities to provide advanced threat prevention and automated network security through a virtual security gateway, with unified security management across all your cloud and on-premises deployments and promoting automation of processes using APIs and supports Infrastructure As Code (IaC) practices.

CloudGuard provide to the security teams a Unified Security Management for the hybrid and on-premises deployments with a single pane-of glass promoting a consistency of security policies across public laaS and hybridclouds and is much more efficient than using one management console for each deployed cloud.